SCANGRIP®
CONNECT

NOVA 2 CONNECT

03.6100C



//Powerbank
Built-in power bank with USB outlet to charge mobile devices



JUST CONNECT
Add the connector matching your battery pack



AMPSHARE
BERNER
BOSCH
BOSCH GREEN
DEWALT
EINHELL
FEIN
FESTOOL
FLEX
HAZET
HIKOKI
INGERSOLL
MAKITA
MILWAUKEE
PANASONIC
RIDGID
SNAP-ON
WÜRTH

3 years warranty*

* go to scangrip.com to register

High efficiency COB LED	165 lm/W	2000 lm @ 100% 1500 lm @ 75% 1000 lm @ 50% 500 lm @ 25% 200 lm @ 10%	300-3000 lux @0.5m	Compatible with METABO/CAS battery system 18V and all other 18V/20V battery packs by using the SCANGRIP CONNECTOR
16W	5.75-58h @18V 5.2 Ah battery	-10° to +40° C	IK07	
1m	IP30	161x164x78 mm	720g	USB power bank: 5V DC / 1A


BATTERY, CHARGER, CONNECTORS AND POWER SUPPLY ARE SOLD SEPARATELY

SCANGRIP CONNECTORs for 18V/20V battery packs



BERNER - 03.6155C
BOSCH / AMPSHARE - 03.6140C
BOSCH GREEN - 03.6141C
DEWALT - 03.6142C
EINHELL - 03.6143C
FEIN - 03.6144C
FESTOOL - 03.6153C
FLEX - 03.6145C
HAZET - 03.6146C
HIKOKI - 03.6147C
INGERSOLL - 03.6152C
MAKITA - 03.6148C
MILWAUKEE - 03.6149C
PANASONIC - 03.6156C
RIDGID - 03.6154C
SNAP-ON - 03.6151C
WÜRTH - 03.6150C


Accessories

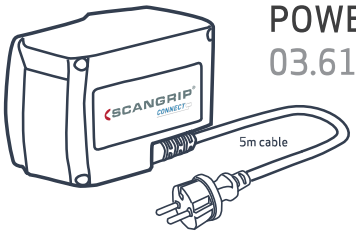

POWER SUPPLY
03.6123C



CAS BATTERY
18V 5.2 Ah
03.6121



CAS CHARGER
03.6122

UK NOVA 2 CONNECT


WARNING:

- Always respect applicable legislation for working with electrical equipment in order to reduce the risk of accidents.
- Avoid looking directly into the beam of light, as this will result in dazzling.
- Do not use the lamp near a naked flame.
- The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.
- Luminaire is only suitable for direct mounting on non-combustible surfaces.

USB POWER OUTLET:

- Built-in USB power outlet to charge mobile devices.
- Output: 5V, 1A

USE:

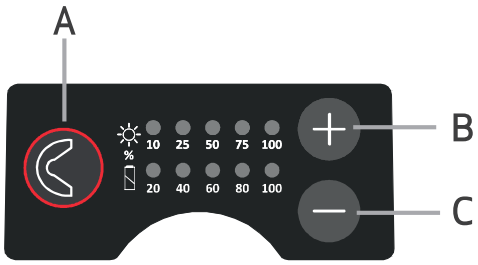

- To turn the lamp on or off, press the A button.
- To increase the brightness, press the B button.
- To decrease the brightness, press the C button.
- When the brightness level is changed, the new value is saved, and the lamp will start at that level the next time it is turned on.

BATTERY COMPLIANCE:

- The work light is designed to be used with Metabo CAS batteries.
- The lamp is also compatible with 3rd party 18V/20V batteries by using the SCANGRIP CONNECT system.
- It will accept the following battery voltages; 18V/20V.
- It is possible to use a Scangrip power supply instead of a battery.

WARNING - RISK OF FIRE:

- Minimum distance from lighted objects 0.1m 

Discarded electrical products must not be disposed of together with household waste. Please use recycling facilities. Ask your local authority or retailer for advice on recycling.