SCANGRIP® CONNECT

# NOVA 4 CONNECT

03.6101C

Bluetooth®
Light control app





//Powerbank
Built-in power bank with USB outlet to charge mobile devices

3 years warranty*

* go to scangrip.com to register




**JUST CONNECT**
Add the connector matching your battery pack



AMPSHARE
BERNER
BOSCH
BOSCH GREEN
DEWALT
EINHELL
FEIN
FESTOOL
FLEX
HAZET
HIKOKI
INGERSOLL
MAKITA
MILWAUKEE
PANASONIC
RIDGID
SNAP-ON
WÜRTH

- High efficiency COB LED
- 160 lm/W
- 4000 lm @ 100%<br>3000 lm @ 75%<br>2000 lm @ 50%<br>1000 lm @ 25%<br>400 lm @ 10%
- 600-6000 lux @0.5m
- Compatible with METABO / CAS battery system 18V and all other 18V/20V battery packs by using the SCANGRIP CONNECTOR
- 30W
- 3-31h @18V 5.2 Ah battery<br>Backup: 2.5h@400 lm
- -10° to +40° C
- IK07
- 1m
- IP65<br>IP54 with battery cover
- 263x230x119 mm
- 2.36 kg
- USB power bank:<br>5V DC / 1A


# BATTERY, CHARGER, CONNECTORS AND POWER SUPPLY ARE SOLD SEPARATELY

## SCANGRIP CONNECTORs for 18V/20V battery packs




BERNER - 03.6155C
BOSCH / AMPSHARE - 03.6140C
BOSCH GREEN - 03.6141C
DEWALT - 03.6142C
EINHELL - 03.6143C
FEIN - 03.6144C
FESTOOL - 03.6153C
FLEX - 03.6145C
HAZET - 03.6146C
HIKOKI - 03.6147C
INGERSOLL - 03.6152C
MAKITA - 03.6148C
MILWAUKEE - 03.6149C
PANASONIC - 03.6156C
RIDGID - 03.6154C
SNAP-ON - 03.6151C
WÜRTH - 03.6150C


## Accessories

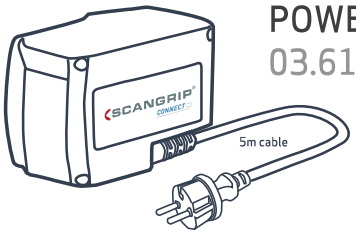


POWER SUPPLY
03.6123C




CAS BATTERY
18V 5.2 Ah
03.6121




CAS CHARGER
03.6122

# UK NOVA 4 CONNECT

WARNING - RISK OF FIRE:
Minimum distance from lighted objects 0.1m


WARNING:
- Always respect applicable legislation for working with electrical equipment in order to reduce the risk of accidents.
- Avoid looking directly into the beam of light, as this will result in dazzling.
- Do not use the lamp near a naked flame.
- Protect the mains cable from oil, heat and sharp edges.
- Internal backup battery must be replaced with an original SCANGRIP battery.
- Do not leave the battery flat, as this could render it INCAPABLE of being charged again.
- The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.
- Luminaire is only suitable for direct mounting on non-combustible surfaces.
- The luminaire is designed to work with all Metabo CAS battery packs.
- If the lamp is disconnected from mains and the battery is discharged, push the power button to enable internal back up battery. 10% LED will blink to indicate back up mode.

THE PROCESS TO DELETE THE PIN CODE IS:
- Turn on the Bluetooth function.
- Press the Bluetooth button for 10 second.
- The pin code is reset.

INTEGRATED BLUETOOTH LIGHT CONTROL:
- Turn lamp on/off or adjust lamp output.
- Connect, up to 4 lamps together.
- Assign a pincode to prevent other users from controlling the lamp.

Compliant with iOS 10.3 or higher and Android 5.0 or higher.
Go to iTunes App Store, Google Play or download the app from our website.

USE:
- To turn the lamp on or off, press the A button.
- To increase the brightness, press the B button.
- To decrease the brightness, press the C button.
- When the brightness level is changed, the new value is saved, and the lamp will start at that level the next time it is turned on.
- To enable/disable Bluetooth, press the D button.

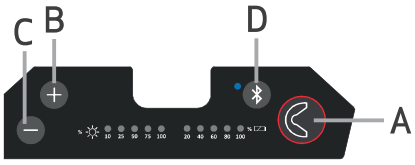


THE LAMP HAS THREE DIFFERENT IP RATINGS DEPENDING ON THE USE:
- IP65 when used with a Scangrip power supply.
- IP54 When the battery cover is mounted and closed.
- IP30 When the battery cover is removed and using an external battery.

BATTERY COMPLIANCE:
- The work light is designed to be used with Metabo CAS batteries.
- The lamp is also compatible with 3rd party 18V/20V batteries by using the SCANGRIP CONNECT system.
- It will accept the following battery voltages: 18V/20V.
- It is possible to use a Scangrip power supply instead of a battery.
- When using a Scangrip power supply the battery cover must be removed.

USB POWER OUTLET:
- Built-in USB power outlet to charge mobile devices.
- Output: 5V, 1A
- The USB outlet is disabled when the lamp is in backup mode.

Discarded electrical products must not be disposed of together with household waste. Please use recycling facilities. Ask your local authority or retailer for advice on recycling.
- The battery must be removed from the device before it is broken up
- The device must be disconnected from the mains when the battery is removed
- Please dispose of the battery safely