

Test Report

No.SDHL251202323601FT

Date: Jan 04, 2026

Page 1 of 8

GUANGDONG HANTRUST TECHNOLOGY LIMITED
ROOM 117, NO.3 EAST 5TH STREET, LINGNAN XINGHE HONOR,NANSHA STREET,
NANSHA DISTRICT, GUANGZHOU

Sample Description : MATERIAL OF HOYLAKES HIGH BACK EXECUTIVE MESH TASK CHAIR
Item No. : LB300T1-K
Country of Origin : CHINA
Country of Destination : UNITED KINGDOM

As above test item and its relevant information regarding to the submission are provided and confirmed by the applicant. SGS is not liable to either the test item or its relevant information, in terms of the accuracy, suitability, reliability or/and integrity accordingly.

SGS Ref No. : SDFTS25008230R01_EN
Sample Receiving Date : Dec 17, 2025
Test Performing Date : Dec 18, 2025 to Jan 04, 2026
Test Performed : Selected test(s) as requested by applicant

Test Result Summary

No.	Test(s) Requested	Result(s)	Comments
1	Medium hazard in BS 7176:2007+A1:2011 Specification for resistance to ignition of upholstered furniture for non-domestic seating by testing composites	PASS	/
For further details, please refer to the following page(s)			

Signed for and on behalf of
SGS-CSTC Standards Technical Services Co., Ltd. Shunde Branch

Marco Leung

Marco Leung
Authorized Signatory

Scan to see the report



SDHL251202323601FT
Verification:
check.sgschina.com.cn



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1-2/F., Building 1, European Industrial Park, No.1, Shunhe South Road, Wusha, Daliang, Shunde District, Foshan, Guangdong, China 528300 t (86-757)22805888 www.sgschina.com.cn
中国·广东·佛山市顺德区大良街道办事处五沙社区居民委员会顺和南路1号欧洲工业园一号厂房首层、二层 邮编: 528300 t (86-757)22805888 sgs.china@sgs.com

Test Conducted:

These tests are conducted in medium hazard of BS 7176:2007+A1:2011 according to the application, and the test methods are based on BS EN 1021-1 & 2:2006, BS 5852:2006 Clause 11 and BS5852-part 2:1982.

I Sample Details

Components:	Visible Cover	Filling
Materials:	Fabric	Foam
Weight & Density of sample:	1.13 kg/m ²	50.3 kg/m ³

II Precondition and Test Condition

Soaking Condition	☒ YES (All outer covers and inner covers that have been chemically treated to reduce their ignitability shall be subjected to the water soaking and drying procedure specified in BS 5852:2006, Annex E prior to being conditioned.)		
Precondition:	Indoor Ambient Condition	72 h	
Conditioning of Test Specimen and Ignition Source(s):	(23±2) °C	RH (50±5) %	24 h
Testing Enclosure (fume cupboard /room):	22.7 °C	RH 49.2 %	---

III Test Results

Clause	Principle /Requirement	Result
	Performance requirements for resistance to ignition	
	4.1 Ignitability Medium hazard	
4	4.1.1 The composite shall meet the levels of ignition resistance Medium hazard Composite test. a) Smouldering cigarette as specified in BS EN 1021-1:2006.(See Annex I, A) b) Match flame equivalent as specified in BS EN 1021-2:2006.(See Annex I, B) c) Ignition source 5 as specified in BS 5852:2006, Clause 11(See Annex I, C)	a): PASS b): PASS c): PASS
	4.1.2 All filling materials for all hazard categories shall pass the relevant test: Polyurethane foam in block or cushion form shall pass the relevant test contained in the Annex A.(See Annex II)	PASS
5	Sampling and frequency of testing Each upholstery composite shall be tested in accordance with the relevant tests identified in Table 1 for the appropriate hazard category every 2 500 units produced or once per month. Retesting shall be carried out where there is any major basic alteration to a furniture specification.	N/P
6	Labeling And Identification Each unit of upholstered furniture shall carry a permanently attached and clearly readable label (see Figures 1 to 4). The size of the graphic part of the label shall be not less than 50 mm × 50 mm. The base colour of the label shall be white with a green border. The word "RESISTANT" shall be white and of minimum height 5 mm. The smouldering cigarette flaming match, flame and ignition source number(s) shall be black. "Conforms to BS 7176:2007 for medium hazard (not recommended for use in higher hazard areas)"shall appear on the label. The letters of the wording shall be easily legible and of minimum height 2 mm.	N/P



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1-2/F, Building 1, European Industrial Park, No.1, Shunhe South Road, Wusha, Daliang, Shunde District, Foshan, Guangdong, China 528300 t (86-757)22805888 www.sgs.com.cn
中国·广东·佛山市顺德区大良街道办事处五沙社区居民委员会顺和南路1号欧洲工业园一号厂房首层、二层 邮编: 528300 t (86-757)22805888 sgs.china@sgs.com

Annex I: Details of Composite Test
Test Results:

The following test results relate only to the ignitability of the sample or combination of materials under the particular condition of test. They are not intended as a means of assessing the full potential fire hazard of the materials or products in use.

(A) BS EN1021-1:2006 Furniture – Assessment of the ignitability of upholstered furniture
Part 1: Ignition source smouldering cigarette

Test Criteria	Results	
	1 st	2 nd
(A) Progressive Smouldering Ignition		
① Any test assembly displays escalating combustion behaviour so that it is unsafe to continue the test;	NO	NO
② Any test assembly smoulders until it is largely consumed within the test duration;	NO	NO
③ Any test assembly smoulders to the extremities of the specimen ,viz, upper or lower margins , either side or to its full thickness, within the duration of the test;	NO	NO
④ Any test assembly smoulders after one hour from the beginning of the test;	NO	NO
⑤ Whether the test assembly that, on final examination, shows evidence of active smouldering;	NO	NO
(B)Flaming Ignition		
The occurrence of any flames initiated by a smouldering source	NO	NO
(C) Final Examination		
Immediately after completion of the test programme on the assembly, dismantle it and examine it internally for progressive smouldering ignition, if this is found, extinguish the test assembly, and record an ignition.	No Ignition	

Test Details:

Test	Ignition Source	Time to Extinction after Placement of the Cigarette		Comments and Observations
		Flame Ceased Time	Smoking Ceased Time	
1 st	0	0 s	18 min 07 s	#2
2 nd	0	0 s	18 min 46 s	#2

Sub–Conclusion: PASS


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1-2/F., Building 1, European Industrial Park, No.1, Shunhe South Road, Wusha, Daliang, Shunde District, Foshan, Guangdong, China 528300 t (86-757)22805888 www.ssgsgroup.com.cn
中国·广东·佛山市顺德区大良街道办事处五沙社区居民委员会顺和南路1号欧洲工业园一号厂房首层、二层 邮编: 528300 t (86-757)22805888 sgs.china@sgs.com

(B) BS EN 1021-2:2006 Furniture – Assessment of the ignitability of upholstered furniture
Part 2: Ignition source match flame equivalent

Test Criteria	Results		
	1 st	2 nd	3 rd
(A) Progressive Smouldering Ignition			
① Any test assembly displays escalating combustion behaviour so that it is unsafe to continue the test and active extinction is necessary	NO	NO	NO
② Any test assembly smoulders until it is largely consumed within the test duration	NO	NO	NO
③ Any test assembly smoulders to the extremities of the specimen ,viz. upper or lower margins , either side or to its full thickness, within the duration of the test	NO	NO	NO
④ Any test assembly smoulders after one hour from the beginning of the test	NO	NO	NO
⑤ Any test assembly, on final examination, shows evidence of active smouldering	NO	NO	NO
(B) Flaming Ignition			
① Any test assembly displays escalating combustion behavior so that it is unsafe to continue the test and active extinction is necessary	NO	NO	NO
② Any test assembly burns until it is essentially consumed within the test duration	NO	NO	NO
③ Any test assembly on which any flame front reaches the lower merge, either side or passes through its full thickness within the duration of the test.	NO	NO	NO
④Any flaming which continues for more than 120s after removal of the burner tube.	NO	NO	NO
(C) Final Examination			
Immediately after completion of the test programme on the assembly, dismantle it and examine it internally for progressive smouldering ignition, if this is found, extinguish the test assembly, and record an ignition.	No Ignition		

Test Details:

Test	Ignition Source	Ignition Time	Time to Extinction after Removal of the Burner(second)		Comments and Observation
			Flame Ceased Time	Smoking Ceased Time	
1 st	1	(15±1)s	0	16	#3
2 nd	1	(15±1)s	0	16	#3
3 rd	1	(15±1)s	0	14	#3

Sub – Conclusion: PASS


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1-2/F., Building 1, European Industrial Park, No.1, Shunhe South Road, Wusha, Daliang, Shunde District, Foshan, Guangdong, China 528300 t (86-757)22805888 www.sgsgroup.com.cn
 中国·广东·佛山市顺德区大良街道办事处五沙社区居民委员会顺和南路1号欧洲工业园一号厂房首层、二层 邮编: 528300 t (86-757)22805888 sgs.china@sgs.com

(C) BS 5852:2006 Methods of test for assessment of the ignitability of upholstered seating by smouldering and flaming ignition sources (using ignition source 5)

Test Criteria	Test Result	
	1 st	2 nd
(A) Progressive smouldering ignition (BS 5852:2006 Clause 4.1.1)		
①Any test specimen that displays escalating smouldering combustion behaviour so that it is unsafe to continue the test and forcible extinction is required;	NO	NO
② Any test specimen that smoulders until it is essentially consumed or that smoulders to the extremities of the specimen, i.e. to either side or to/through the full thickness of the specimen, within the duration of the test;	NO	NO
③Any test specimen that produces externally detectable amounts of smoke, heat or glowing 60 min after ignition of the crib;	NO	NO
④Any test specimen that, on final examination, shows evidence of charring within the filling (other than discoloration) more than 100 mm in any direction, apart from upwards, from the nearest part of the original position of the source.	NO	NO
(B)Flaming Ignition (BS 5852:2006 Clause 4.2.1)		
①Any test specimen that displays escalating flaming combustion behaviour so that it is unsafe to continue the test and forcible extinction is required;	NO	NO
②Any test specimen that burns until it is essentially consumed within the test duration;	NO	NO
③Any test specimen on which any flame front reaches the extremities of the specimen other than the top of the vertical part of the test specimen, or passes through the full thickness of the specimen within the duration of the test;	NO	NO
④Any test specimen that continues to flame for more than 10 min after ignition of the crib	NO	NO
⑤Any test specimen from which flaming debris causes an isolated floor fire that continues to flame for longer than the time given in ④.	NO	NO
(C)Final Examination		
Immediately after completion of the test programme on the assembly, dismantle it and examine it internally for progressive smouldering ignition, if this is found, extinguish the test assembly, and record an ignition and complete the test report.	No Ignition	



Test Details:

Test	Ignition Source	Duration of			Extent of Damage Component (mm)			Comments and Observations
		Ignition Source	Flames	Smoke	Width	Length	Depth	
1 st	5	2 min 41 s	4 min 11 s	9 min 16 s	58	28	17	#4
2 nd	5	2 min 56 s	4 min 08 s	9 min 03 s	62	33	19	#4

Sub-Conclusion: PASS
Annex II: Filling Material Test as per BS 5852:Part 2:1982

This test, specified in Annex A of BS 7176:2007+A1:2011, is based on BS 5852:Part 2:1982 using ignition source 5.

To assess the ignitability of polyurethane foam in slab or cushion form used in upholstered components when subjected to ignition 5.

Test Results:

Test Criteria	Results	
	1 st test	2 nd test
(A) Progressive Smouldering (Clause 4.1 of BS 5852:Part 2:1982)		
① Whether progressive smouldering is observed when beyond 60 minutes after ignition of the crib	NO	NO
② Whether escalating combustion behaviour is observed so that it is unsafe to continue the test	NO	NO
③ Whether any composite smoulders until it is essentially consumed within the test duration.	NO	NO
④ Whether any composite that smoulders to the extremities the specimen viz. upper or lower margins, either side or to its full thickness within the duration of the test	NO	NO
⑤ Whether any composite on final examination shows evidence of charring more than 100mm in any direction	NO	NO
(B) Flaming (Clause 4.2 of BS 5852:Part 2:1982)		
① Whether any composite that continues to flame for more than 10 minutes after the ignition of the crib	NO	NO



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1-2/F., Building 1, European Industrial Park, No.1, Shunhe South Road, Wusha, Daliang, Shunde District, Foshan, Guangdong, China 528300 t (86-757)22805888 www.ssgsgroup.com.cn
中国·广东·佛山市顺德区大良街道办事处五沙社区居民委员会顺和南路1号欧洲工业园一号厂房首层、二层 邮编: 528300 t (86-757)22805888 sgs.china@sgs.com

Test Criteria	Results	
	1 st test	2 nd test
② Whether escalating combustion behaviour is observed so that it is unsafe to continue the test	NO	NO
③ Whether any composite is essentially consumed within the test duration	NO	NO
④ Whether any composite display that on which flame front reaches the lower margin, either side or passes through the full thickness of the specimen within the duration of the test	NO	NO
(C) Mass Loss (Clause 5 in Schedule 1 Part1 of UK Regulations)		
If failure against the criteria of clause 4 of BS 5852 : part 2 has occurred but only by way of damage exceeding the limits defined in A ④, ⑤ and B ④ above and provided that the resultant mass loss is less than 60g the foam passes the ignitability test.	21 g	29 g

Test Details:

Test	Ignition Source	Duration of			Extent of Damage Component (mm)			Comments and Observations
		Ignition Source	Flames	Smoke	Width	Length	Depth	
1 st	5	2 min 47 s	3 min 56 s	8 min 32 s	81	109	36	#5
2 nd	5	2 min 53 s	4 min 06 s	8 min 51 s	92	117	32	#5

Sub-Conclusion: PASS

Remark: N/A=Not Applicable, N/C=Not Conduct, N/P=Not Provided,

- #1—Cigarette fails to smoulder its complete length;
- #2—Cigarette passes to smoulder its complete length, but the sample was not ignition;
- #3—The sample was not ignited after removal of the burner;
- #4—Flaming but self-extinguishment;
- #5—Pass, flaming but self-extinguishment, the resultant mass loss is less than 60g;
- #6—Fail, flaming but self-extinguishment, the resultant mass loss is more than 60g;
- #7—Extinguished by operator, escalating flaming combustion;
- #8—The first test failed, so retest was not conducted.





Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1-2/F., Building 1, European Industrial Park, No.1, Shunhe South Road, Wusha, Daliang, Shunde District, Foshan, Guangdong, China 528300 t (86-757)22805888 www.sgs.com.cn
中国·广东·佛山市顺德区大良街道办事处五沙社区居民委员会顺和南路1号欧洲工业园一号厂房首层、二层 邮编: 528300 t (86-757)22805888 sgs.china@sgs.com

Photo Appendix:

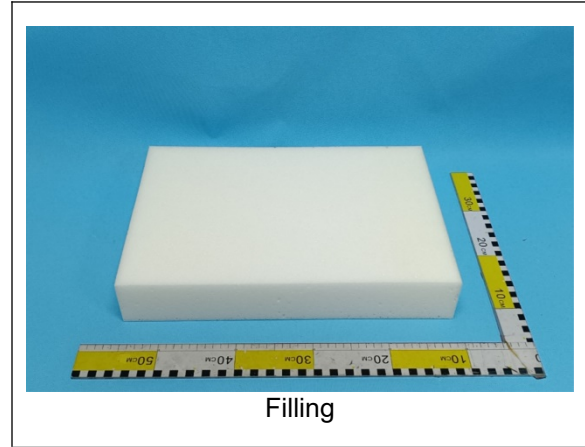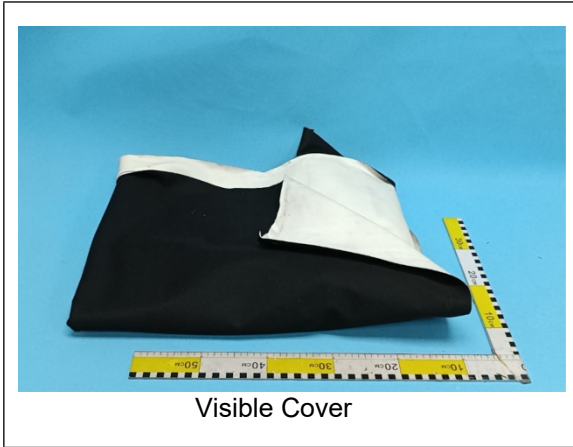

End of Report