Technical Data


Product Code	771920 / 771932
Model Number	SBT2
Description	Tucson 2 bar Positive Head Twin Impeller Shower Pump
Voltage / Frequency	230V / 50Hz
Wattage	500W
Insulation Class	F
Operating Environment Temperature	5°-40°C
Maximum Water Temperature	65°C
Minimum Inlet Head	0.5 m
Max Working Pressure	10 Bar
Maximum Head	21m
Max Flowrate / Q Max	47 l/min
Acoustic Noise	<60 dB
Ingress Protection Rating	IP44
Inlet & Outlet Connection	Flexible Hoses with ¾" Irish or 22mm Metric Compression Fittings
AC Connection	1.5m cable with 3-pin plug
Pump Weight	7.5 kg
Material Specification	Pump housing – CW617N Impeller - CW617N Mechanical Seal – Carbon Ceramic EPDM Control Box – ABS+PC Motor Housing – ADC12 Flexi Hoses – CW617N fitting, EPDM hoses with SUS304 braiding
Manufacturing Standards	LVD EN IEC 60335-2-41:2021/A11:2021 EN 60335-1:2012/A15:2021 EN 62233:2008 WRAS Approved BS 6920-1: 2014


2 bar Positive Head Pump Image





2 bar Positive Head Pump Dimensions

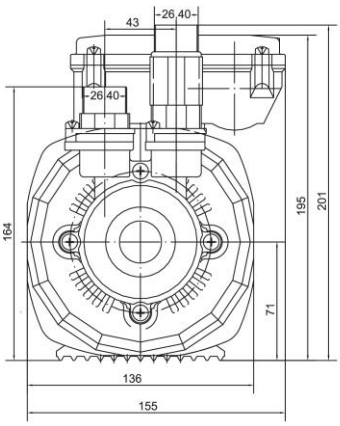

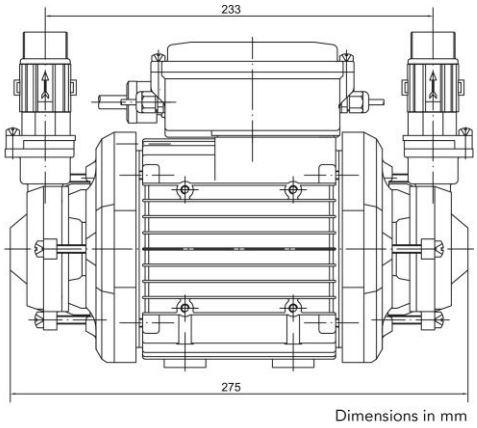

2 bar Positive Head Performance Curve

