SOAKAWAY

Purpose made to British Standards for condensate discharge from a boiler.

Conforms fully to BS6798:2014 Annex A, figure A.6. Example of purpose made soakaway (see over).

For external use only.

10 year warranty.

Compatible with 22mm, 32mm and 40mm condensate pipe.
Limestone chippings should contain a high calcium content.

The Calmag soakaway should be used in conjunction with 10mm limestone chippings.


See reverse for installation guidelines.

Visit Plumb2u

See product

SOAKAWAY

Purpose made to British Standards for condensate discharge from a boiler.

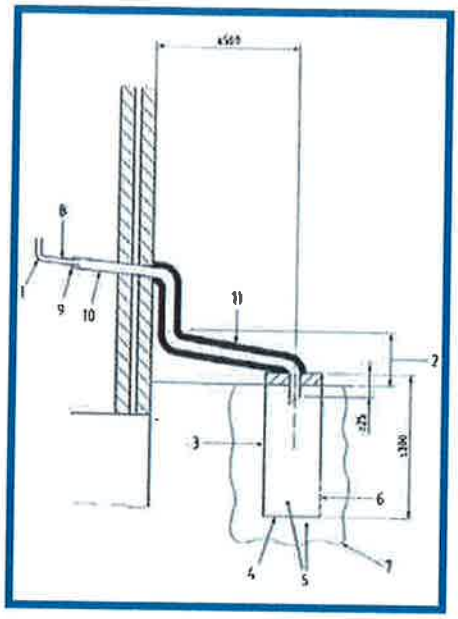

Instructions:

1. Condensate discharge pipe from boiler
2. Ground (this section of the condensate drainage pipe may be run either above or below ground); end cut at 45°
3. Diameter 100mm min, plastic tube
4. Bottom of tube sealed
5. Limestone chippings, both inside and outside the soakway tube
6. Two rows of three 12mm holes at 25mm centres, 50mm from bottom of tube and facing away from house
7. Hole depth 400mm min. by 300mm diameter
8. Minimum internal diameter 19mm
9. Pipe size transition point
10. Minimum internal diameter 30mm
11. Insulation

Visit Plumb2u
See product