



WL601622H

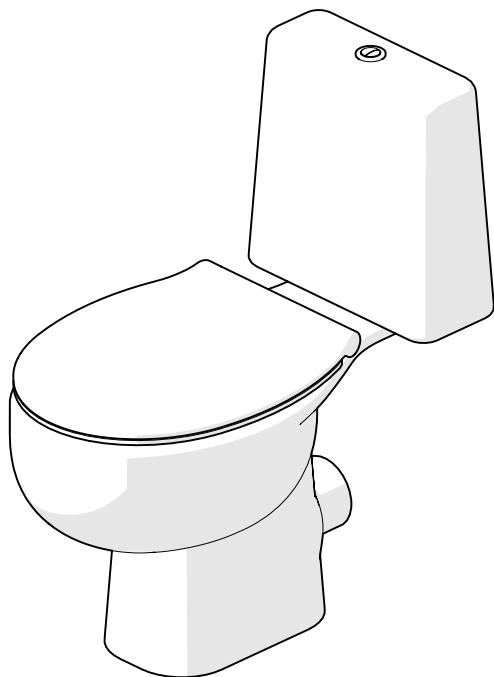

Please read the information sheet before proceeding.

WHAT TO KNOW BEFORE INSTALLING...

1. When positioning the seat onto the pan ensure that the lid and ring can be lifted and remain upright on the pan. In some cases the seat can be obstructed by the cistern or the flush handle which prevents it from staying upright.
2. Before activating the grip pad technology (Step 10) ensure the toilet seat is in a perfect position as it cannot be reused without compromising performance.
3. To remove the seat at the end of its use, use a scraper to carefully lever the hinge away from the toilet pan.

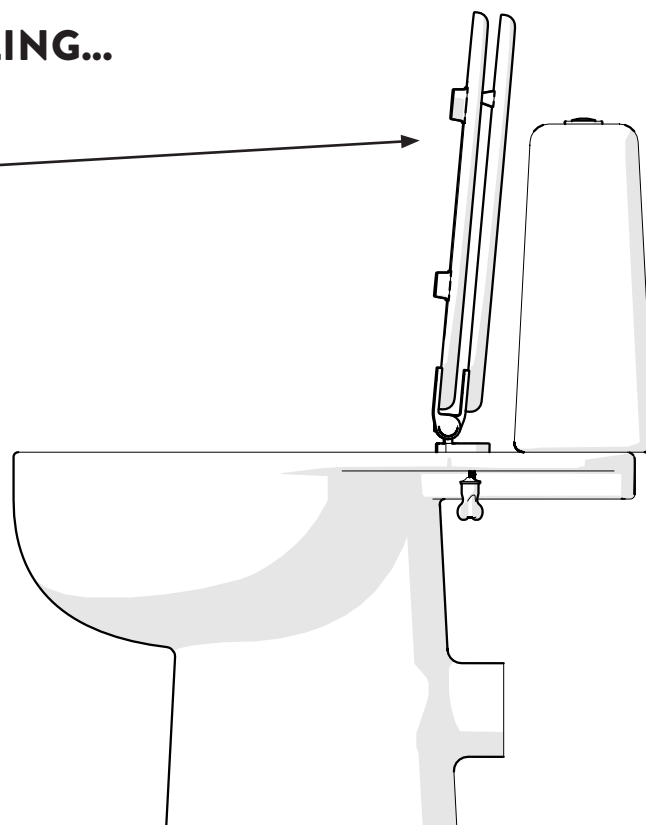

Croydex, Central Way, Andover, Hampshire, SP10 5AW, UK

+44 (0) 1264 365881

+44 (0) 1264 356437

info@croydex.co.uk

www.croydex.com

TS 052 R02

Visit Plumb2u

See product

ICON LIBRARY



For reference only







Parts may vary.
(Optional)










Warning! Please
take special care.

PLEASE READ ALL OF THE INFORMATION CAREFULLY AND REFER BACK WHEN YOU SEE THE NUMBERED ICONS THROUGHOUT INSTRUCTIONS.


SAFETY AND CARE

-  To retain the best quality finish, clean product with a soft cloth and a mild soap solution.
-  Do not use abrasive or chemical cleaners as they may damage the surface of the toilet seat or hinges.
-  Spray cleaning liquids onto the cloth and not directly onto the product.
-  Take care when cleaning the toilet pan with chemical cleaners. Avoid contact of the chemical cleaners with the toilet seat or hinges. Immediately rinse off any splashes to avoid damage or discolouration to the surface of the toilet seat and hinge parts.

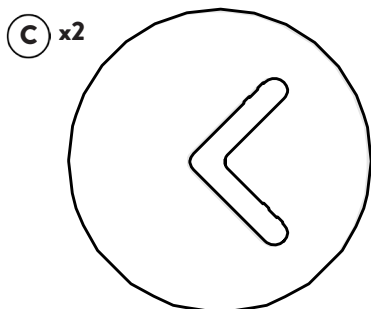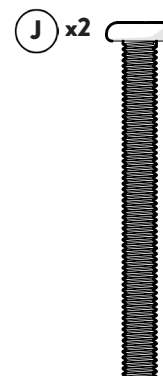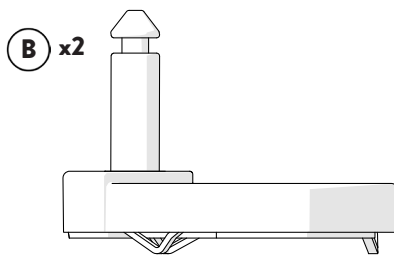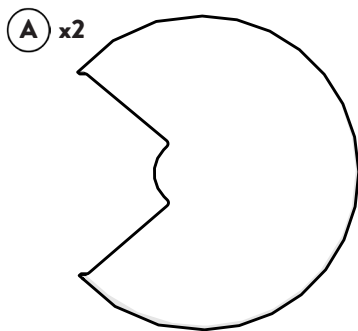

2.

 Croydex, Central Way, Andover,
Hampshire, SP10 5AW, UK

 +44 (0) 1264 365881

 +44 (0) 1264 356437

 info@croydex.co.uk

 www.croydex.com

TS 052 R02

Visit Plumb2u

See product

1. BEFORE YOU BEGIN

PREPARATION

- Remove the old seat from the pan and clean the surface around the fixing holes.
- Ensure the surfaces around the fixing holes are completely dry before beginning the installation.


PLACEMENT

In its sealed packaging place the seat over your pan to ensure you are happy with size and shape of the toilet seat.


HELPFUL ADVICE

To ensure you do not lose any components down the toilet you may want to place cling film over the bowl of the toilet.

2.





Remove the decorative caps from the hinges.

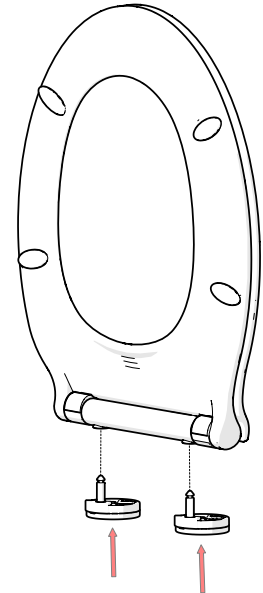


Place hinges into the toilet seat.

3.

Ensure hinges are in the correct alignment allowing you to position the seat on your pan.

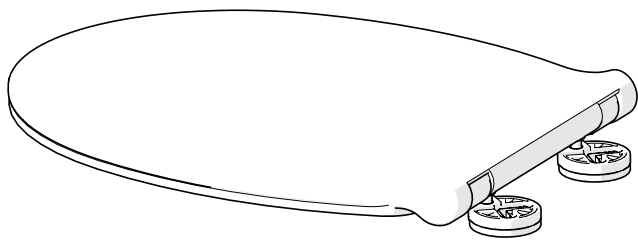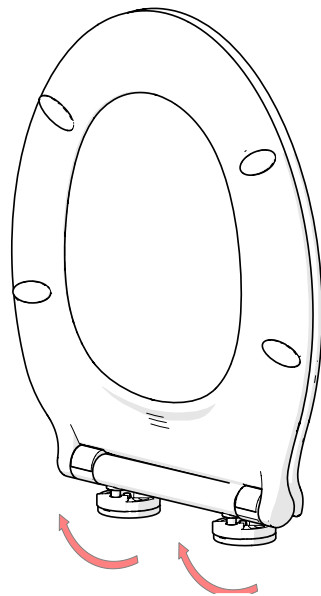


4.

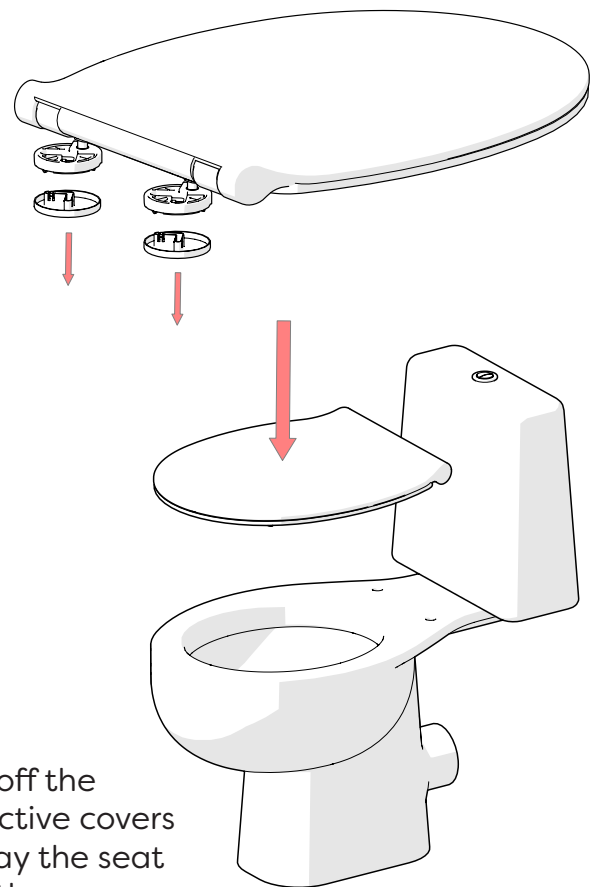


Take off the protective covers and lay the seat onto the pan.

3.

 Croydex, Central Way, Andover, Hampshire, SP10 5AW, UK

 +44 (0) 1264 365881

 +44 (0) 1264 356437

 info@croydex.co.uk

 www.croydex.com


TS 052 R02

Visit Plumb2u

See product

5.

5a.

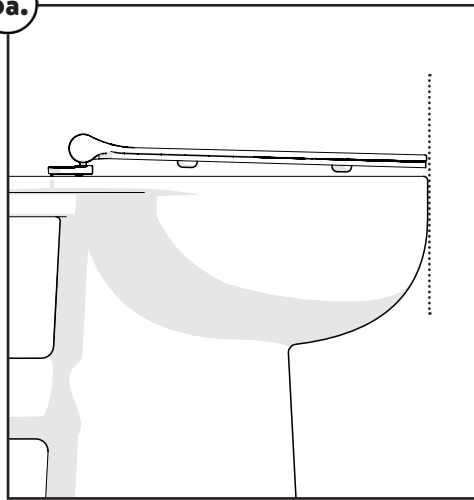


5a.

Align the seat with the front of the toilet pan.


5b.

Rotate the hinge bases until you align the V shaped slot with the fixing holes of the toilet pan.

5b.

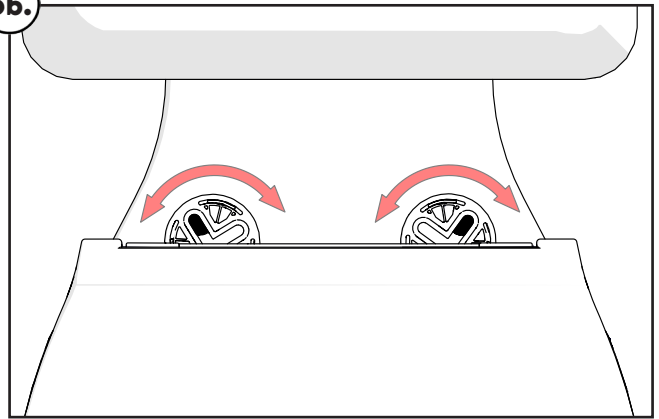


5b.

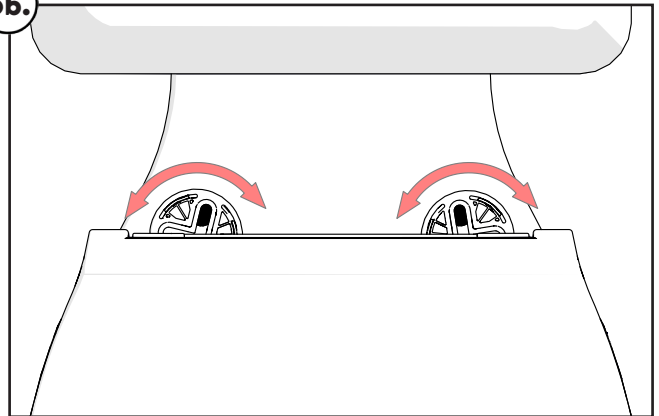

*Hinge positions should be symmetrical.

6.

Remove the protective film to reveal the grip pad and place bolts into the hinge base.

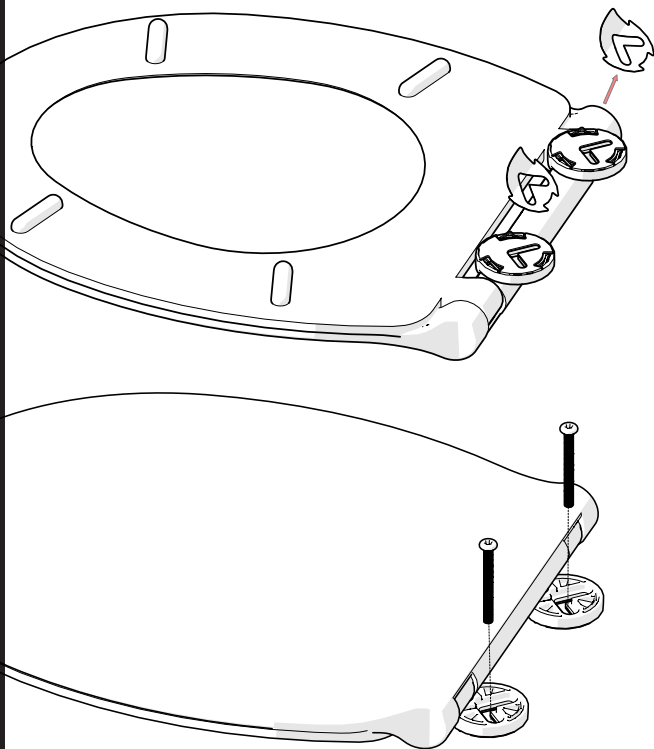


7.

TOP OR BOTTOM FIXINGS?

TOP FIX


- Fits most toilet pans.
- Suitable for back to wall pans.
- No need to reach underneath the toilet pan.



OR

BOTTOM FIX

- Faster installation.

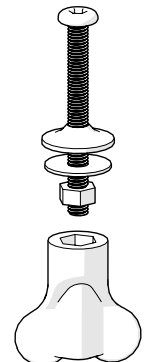

4.

Croydex, Central Way, Andover, Hampshire, SP10 5AW, UK

+44 (0) 1264 365881

+44 (0) 1264 356437

info@croydex.co.uk


www.croydex.com

TS 052 R02


Visit Plumb2u

See product

8.



For top fix, insert the rubber plugs into the holes in the toilet pan.

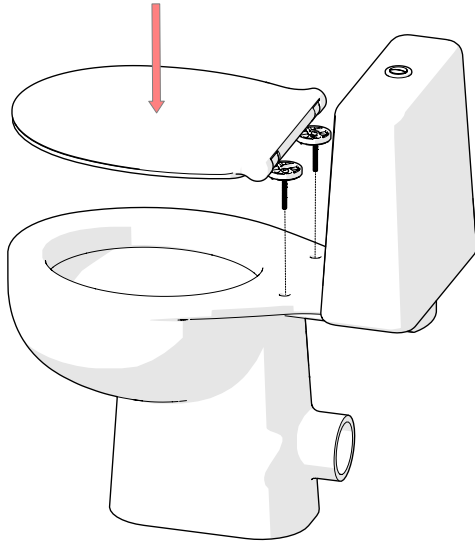


Carefully place the seat on the pan ensuring the Grip Pad does not stick to the pan surface at this stage of installation.

10.

Complete a final check to ensure that you are happy with the position of the seat. Then apply pressure to the hinges to collapse the supports allowing the grip pad to bond to the toilet pan.

Hold for at least 20 seconds.

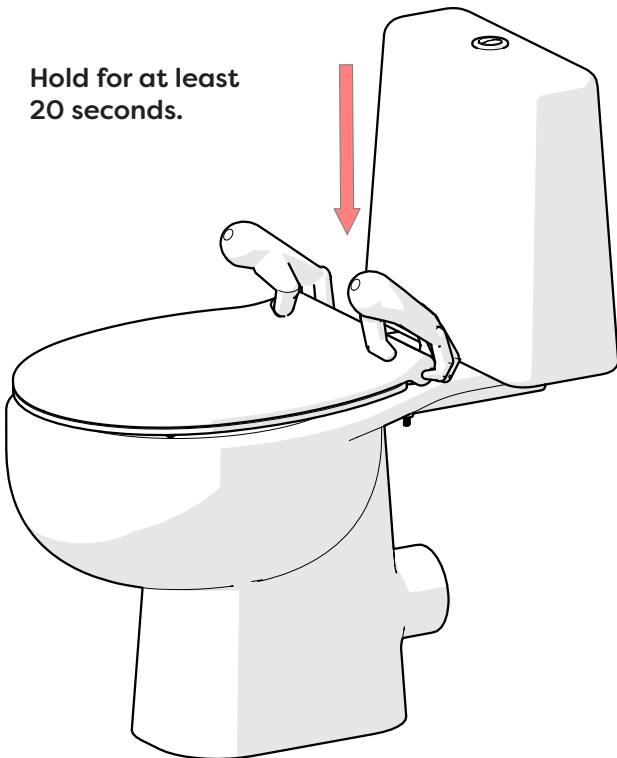


9.

Lightly screw the bolt into place using your chosen fixing method. **Do not collapse the supports on the hinge base yet.**


BOTTOM FIX

TOP FIX

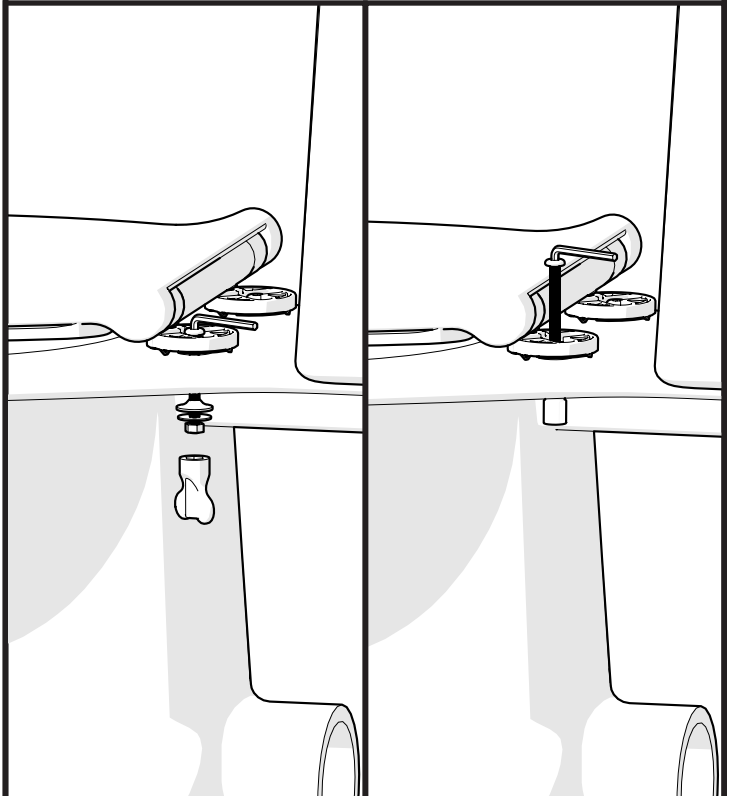


11.


PRESS

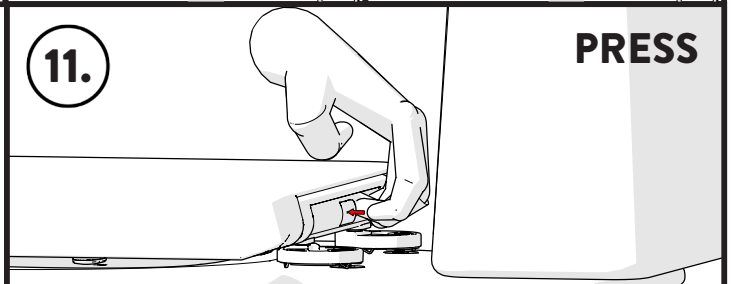


HOLD

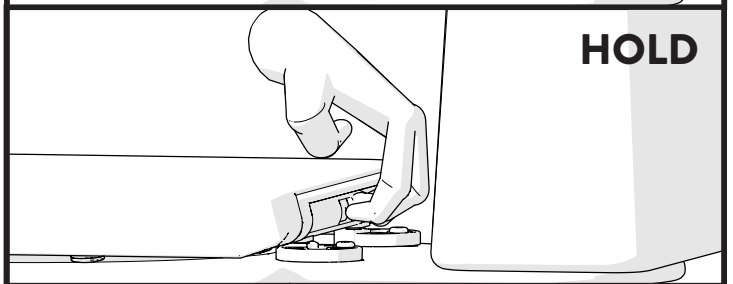


LIFT

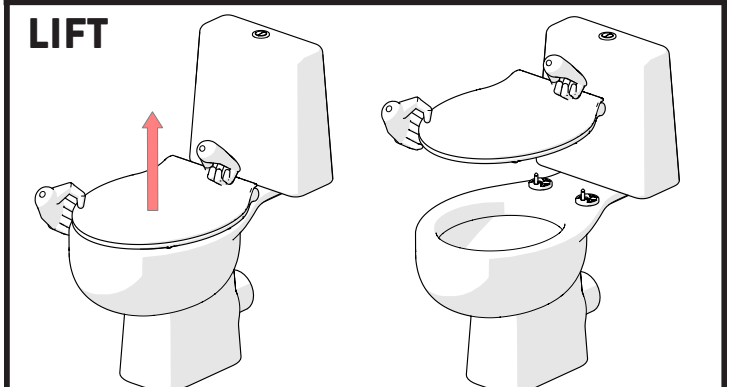

5.

 Croydex, Central Way, Andover, Hampshire, SP10 5AW, UK

 +44 (0) 1264 365881

 +44 (0) 1264 356437

 info@croydex.co.uk

 www.croydex.com

TS 052 R02

Visit Plumb2u


See product

12.

Fully tighten the bolt using your preferred fixing method.



BOTTOM FIX

TOP FIX

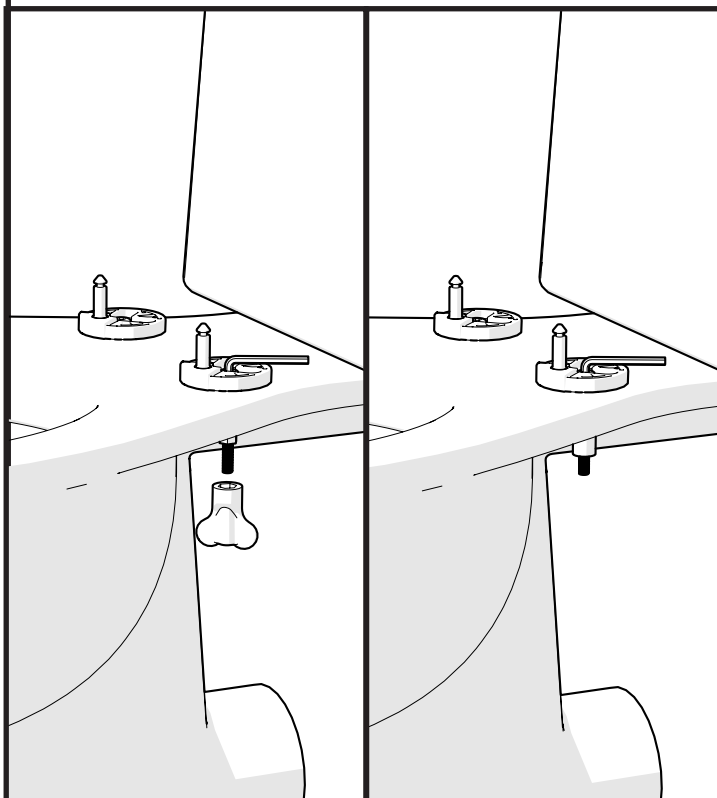



13.

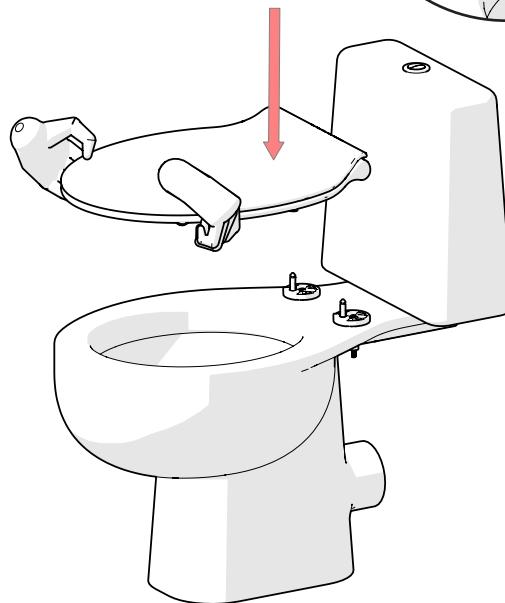
Place on the decorative caps and push lock the seat onto the hinges.



6.

 Croydex, Central Way, Andover, Hampshire, SP10 5AW, UK

 +44 (0) 1264 365881

 +44 (0) 1264 356437

 info@croydex.co.uk

 www.croydex.com

TS 052 R02

Visit Plumb2u

See product

Check out our full range of Bathroom Accessories

Bathroom Accessory Sets

Heated Towel Rails

Bathroom Extractor Fans

Bathroom Lighting

Shower Seats

Grab Rails

Shower Curtains

Toilet Brushes

Bathroom Cleaning Products

Wall Mounted Bathroom Accessories

Robe Hooks

Bathroom Tumblers

Toilet Roll Holders

Soap Dishes

Towel Rings

Shower Caddies

Bathroom Mirrors

Standard Bathroom Mirrors

LED Bathroom Mirrors

Shaving Mirrors

plumbworld
Big brands, small prices.

[Visit Plumb2u](#)

[See product](#)