



## Product

10000512 - 5 Litre Volumiser Vessel  
 10001216 - 12 Litre Volumiser Vessel  
 10001836 - 18 Litre Volumiser Vessel  
 10003510 - 35 Litre Volumiser Vessel  
 10005022 - 50 Litre Volumiser Vessel  
 10010518 - 105 Litre Volumiser Vessel

## Technical Specification

Max Pressure: 10 Bar


Colour: White

Operating Temperature: -10°C to 110°C

Shell: Carbon Steel

Litres	Height "H"	Diameter "Ø"	Connection Height "E"	Connection Size "C"
5	270	160	-	3/4"G
12	264	270	-	3/4"G
18	349	270	-	3/4"G
35	367	380	125	3/4"G
50	505	380	146	3/4"G
105	665	500	165	1"G

## Drawings

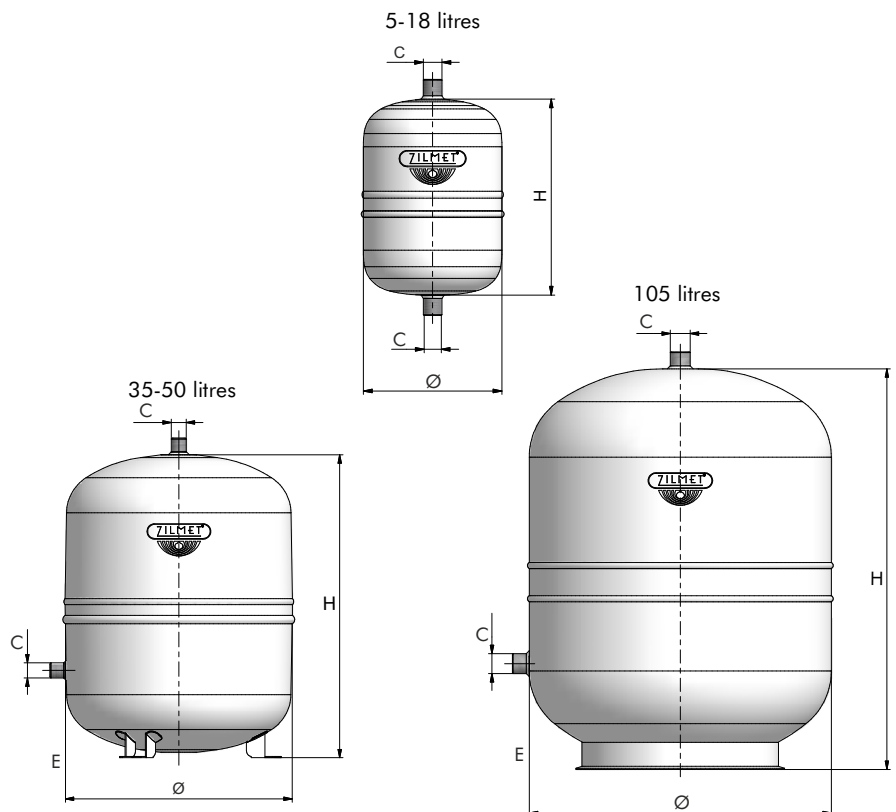

## Additional Information

Provides a bypass route to maintain the minimum flow rate through the heat pump

Promotes energy efficiency

Prevents short cycling

Can be used as an intermediate vessel to protect the expansion vessel membrane from excess temperatures on a solar system

Suitable for heat pump and solar systems

Equipped with entry and exit connections

Complies with PED 2014/68/EU

Suitable for solar systems in accordance with EN12977

Visit [Plumb2u](http://Plumb2u.com)

See product



Scan For Further Information

Intatec, Airfield Industrial Estate, Hixon, Stafford, ST18 0PF  
 T. 01889 272180 F. 01889 272181 E. [sales@intatec.co.uk](mailto:sales@intatec.co.uk)

[www.intatec.co.uk](http://www.intatec.co.uk)