



System Components

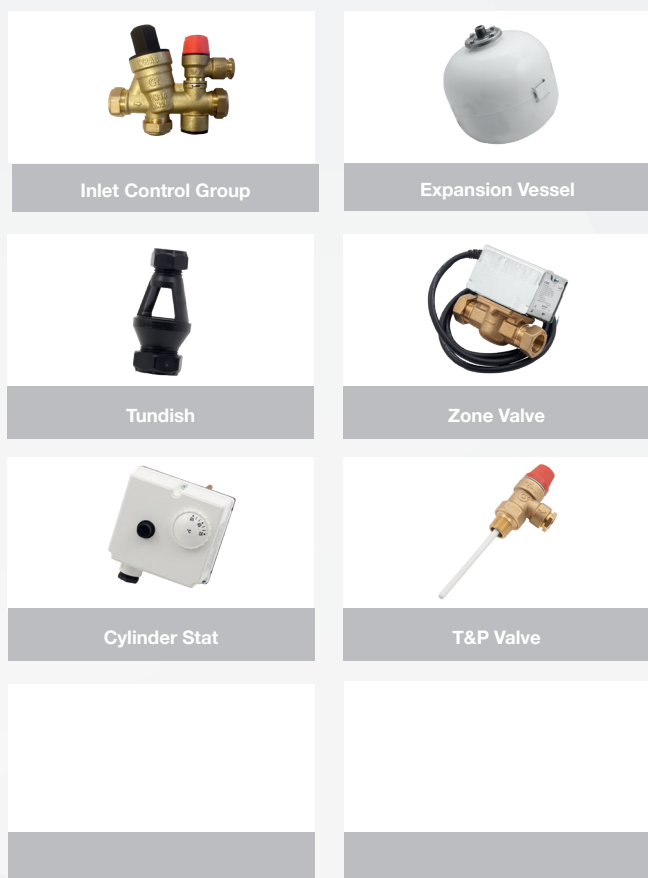

Dimensions

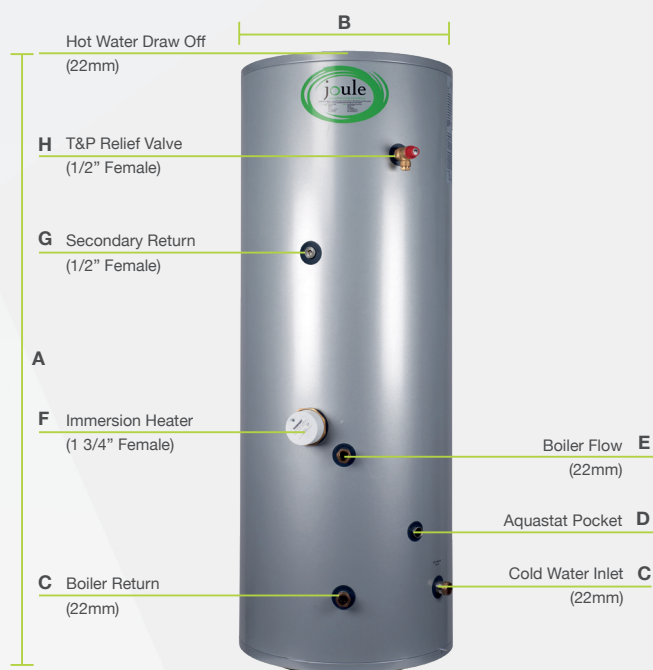

Indirect

| Capacity | 90L | 125L | 150L | 170L | 200L | 200L | 250L | 250L | 300L | 300L | 400L | 500L |
|----------------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
| Code | TCEMVI-0090LFB | TCEMVI-0125LFB | TCEMVI-0150LFB | TCEMVI-0170LFB | TCEMVI-0200NFC | TCEMVI-0200LFC | TCEMVI-0250NFC | TCEMVI-0250LFC | TCEMVI-0300NFC | TCEMVI-0300LFC | TCEMVI-0400LFC | TCEMVI-0500LFC |
| Height (A) | 750 | 1030 | 1190 | 1310 | 1150 | 1490 | 1400 | 1815 | 1600 | 2040 | 1570 | 1900 |
| Diameter (B) | 540 | 540 | 540 | 540 | 600 | 540 | 600 | 540 | 600 | 540 | 710 | 710 |
| Weight (empty) | 39 | 35 | 39 | 43 | 46 | 47 | 56 | 57 | 64 | 65 | 71 | 87 |
| Weight (full) | 135 | 158 | 187 | 210 | 243 | 244 | 302 | 303 | 360 | 361 | 471 | 589 |
| Hot water volume | 96 | 124 | 148 | 168 | 194 | 196 | 247 | 247 | 290 | 289 | 390 | 494 |
| C | 188 | 196 | 196 | 196 | 218 | 196 | 218 | 196 | 218 | 196 | 225 | 225 |
| D | 333 | 211 | 341 | 341 | 423 | 336 | 383 | 361 | 383 | 361 | 405 | 455 |
| E | 478 | 511 | 486 | 486 | 538 | 516 | 608 | 586 | 608 | 586 | 675 | 745 |
| F | 543 | 651 | 551 | 551 | 603 | 581 | 673 | 651 | 673 | 651 | 740 | 810 |
| G | 628 | 751 | 786 | 881 | 768 | 981 | 968 | 1271 | 1153 | 1551 | 1180 | 1440 |
| H | 743 | 80 | 911 | 1031 | 883 | 1211 | 1133 | 1531 | 1333 | 1811 | 1280 | 1640 |
| Energy Efficiency Class | B | B | B | B | C | C | C | C | C | C | C | C |
| Heat up Time - coil (Mins) | 14 | 23 | 26 | 27 | 31 | 31 | 37 | 37 | 42 | 42 | 52 | 54 |
| Standing Loss (W) | 44 | 52 | 55 | 58 | 78 | 81 | 87 | 89 | 92 | 103 | 102 | 115 |

Visit [Plumb2u](https://www.plumb2u.com)

See product