

Female press connection

Material



- Main body: pressed brass type CW617, nickel-plated from the outside, on surfaces, which do not have contact with water –
- full anti-diffusion barrier
- Clamping ring: stainless steel
- O-ring gasket: EPDM

Area of application

- Installations of hot & cold tap water
- Central heating (radiator connections)
- Surface heating (underfloor and wall heating installations)
- Ice water

Dimensions

Size	L1	L2	Rp	D	Code
16x1/2"	16,5	26	1/2"	11,8	06011305
16x3/4"	16,5	26	3/4"	11,8	06011307
16x1"	19,5	26	1"	11,8	06011309
18x1/2"	17	26	1/2"	13,8	06011311
18x3/4"	18	26	3/4"	13,8	06011313
20x1/2"	17,5	26	1/2"	15,8	06011315
20x3/4"	18	26	3/4"	15,8	06011317
20x1"	19,5	26	1"	15,8	06011319
25x1/2"	18	32,6	1/2"	19,8	06011321
25x3/4"	16,9	32,6	3/4"	19,8	06011323
25x1"	18,4	32,6	1"	19,8	06011325
32x3/4"	17,4	32,6	3/4"	25,8	06011327
32x1"	19	32,6	1"	25,8	06011329
40x1 1/4"	25	45	1 1/4"	31,8	06011331
50x1 1/2"	24	45	1 1/2"	40,8	06011333
63x2"	30	68	2"	50,7	06011335

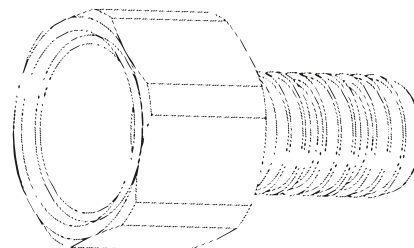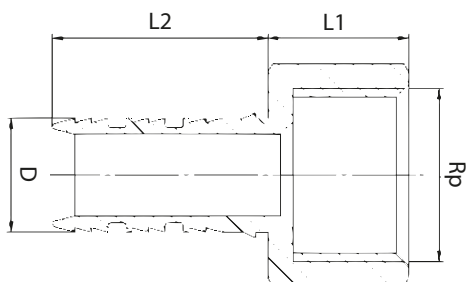

Overview

The connection between the pipe and the fitting is obtained by pressing the pipe into the fitting's profile. The pressing should be made in the connection area, with a pressing tool equipped with U-type inserts, matched to the type of fitting used. The tightness of the connection chamber is guaranteed by two O-rings, perfectly integrated into the joint area. Pressed connections can be used in the floor groove or a wall furrow.



Tweetop sp. z o.o.
Ludowa 24c | 71-700 Szczecin

Scope of delivery

Main body with sealing and clamping rings

Visit [Plumb2u](#)

[See product](#)