

Female press connection

Material



- Main body: pressed brass type CW617, nickel-plated from the outside, on surfaces, which do not have contact with water –
- full anti-diffusion barrier
- Clamping ring: stainless steel
- O-ring gasket: EPDM

Area of application

- Installations of hot & cold tap water
- Central heating (radiator connections)
- Surface heating (underfloor and wall heating installations)
- Ice water

Dimensions

| Size | L1 | L2 | Rp | D | Code |
|-----------|------|------|--------|------|----------|
| 16x1/2" | 16,5 | 26 | 1/2" | 11,8 | 06011305 |
| 16x3/4" | 16,5 | 26 | 3/4" | 11,8 | 06011307 |
| 16x1" | 19,5 | 26 | 1" | 11,8 | 06011309 |
| 18x1/2" | 17 | 26 | 1/2" | 13,8 | 06011311 |
| 18x3/4" | 18 | 26 | 3/4" | 13,8 | 06011313 |
| 20x1/2" | 17,5 | 26 | 1/2" | 15,8 | 06011315 |
| 20x3/4" | 18 | 26 | 3/4" | 15,8 | 06011317 |
| 20x1" | 19,5 | 26 | 1" | 15,8 | 06011319 |
| 25x1/2" | 18 | 32,6 | 1/2" | 19,8 | 06011321 |
| 25x3/4" | 16,9 | 32,6 | 3/4" | 19,8 | 06011323 |
| 25x1" | 18,4 | 32,6 | 1" | 19,8 | 06011325 |
| 32x3/4" | 17,4 | 32,6 | 3/4" | 25,8 | 06011327 |
| 32x1" | 19 | 32,6 | 1" | 25,8 | 06011329 |
| 40x1 1/4" | 25 | 45 | 1 1/4" | 31,8 | 06011331 |
| 50x1 1/2" | 24 | 45 | 1 1/2" | 40,8 | 06011333 |
| 63x2" | 30 | 68 | 2" | 50,7 | 06011335 |

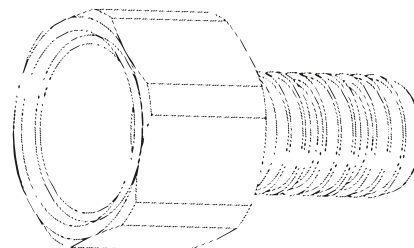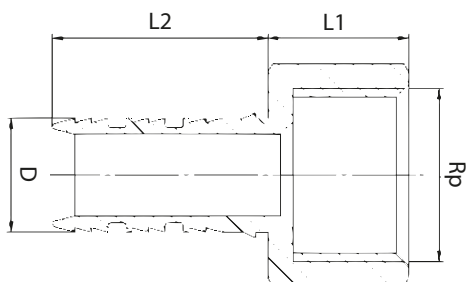

Overview

The connection between the pipe and the fitting is obtained by pressing the pipe into the fitting's profile. The pressing should be made in the connection area, with a pressing tool equipped with U-type inserts, matched to the type of fitting used. The tightness of the connection chamber is guaranteed by two O-rings, perfectly integrated into the joint area. Pressed connections can be used in the floor groove or a wall furrow.



Tweetop sp. z o.o.
Ludowa 24c | 71-700 Szczecin

Scope of delivery

Main body with sealing and clamping rings

Visit [Plumb2u](#)

See product