

Material


- Main body: pressed brass type CW617, nickel-plated from the outside, on surfaces, which do not have contact with water –
- full anti-diffusion barrier
- Clamping ring: stainless steel
- O-ring gasket: EPDM

Area of application

- Installations of hot & cold tap water
- Central heating (radiator connections)
- Surface heating (underfloor and wall heating installations)
- Ice water


Overview

The connection between the pipe and the fitting is obtained by pressing the pipe into the fitting's profile. The pressing should be made in the connection area, with a pressing tool equipped with U-type inserts, matched to the type of fitting used. The tightness of the connection chamber is guaranteed by two O-rings, perfectly integrated into the joint area. Pressed connections can be used in the floor groove or a wall furrow.

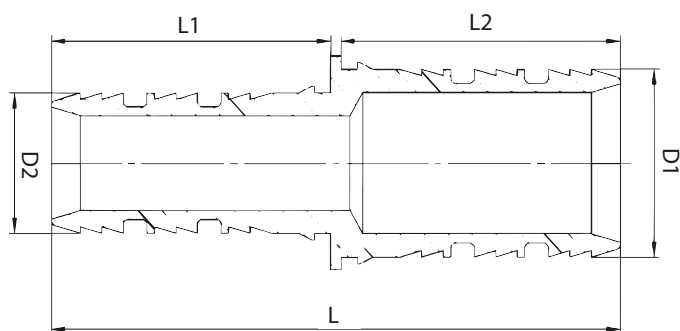

Dimensions

Size	L	L1	L2	D1	D2	Code
18x16	53	26	26	13,8	11,8	06011103
20x16	53	26	26	15,8	11,8	06011105
25x16	59,6	26	32,6	19,8	11,8	06011107
32x16	59,6	26	32,6	25,8	11,8	06011109
20x18	53	26	26	13,8	15,8	06011111
25x18	59,6	26	32,6	19,8	13,8	06011113
32x18	59,6	26	32,6	25,8	13,8	06011115
25x20	59,6	26	32,6	19,8	15,8	06011117
32x20	59,6	26	32,6	25,8	15,8	06011119
32x25	66,2	32,6	32,6	25,8	19,8	06011121
40x20	73	26	45	31,8	15,8	06011122
40x25	79,6	32,6	45	13,8	19,8	06011123
40x32	79,6	32,6	45	31,8	25,8	06011125
50x25	79,6	32,6	45	40,8	19,8	06011124
50x32	79,6	32,6	45	40,8	25,8	06011126
50x40	92	45	45	40,8	31,8	06011127
63x25	102,6	32,6	68	50,7	19,8	06011120
63x32	102,6	32,6	68	50,7	25,8	06011128
63x40	115	45	68	50,7	31,8	06011129
63x50	115	45	68	50,7	40,8	06011131
75x32	102,6	32,6	68	59,6	25,8	06011134
75x40	115	45	68	59,6	31,8	06011132
75x50	115	45	68	59,6	40,8	06011133
75x63	138	68	68	59,6	50,7	06011135

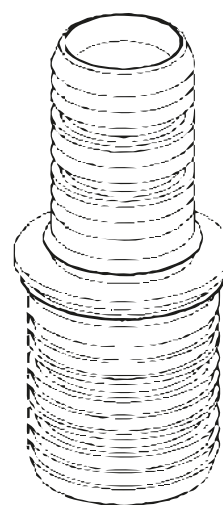

Tweetop sp. z o.o.
Ludowa 24c | 71-700 Szczecin

Scope of delivery

Main body with sealing and clamping rings

Visit [Plumb2u](https://www.plumb2u.com)

See product