

Press tee

Material



- Main body: pressed brass type CW617, nickel-plated from the outside, on surfaces, which do not have contact with water –
- full anti-diffusion barrier
- Clamping ring: stainless steel
- O-ring gasket: EPDM

Area of application

- Installations of hot & cold tap water
- Central heating (radiator connections)
- Surface heating (underfloor and wall heating installations)
- Ice water

Dimensions

| Size | L | L1 | L2 | L3 | D | Code |
|----------|------|------|------|-------|------|----------|
| 16x16x16 | 72 | 26 | 26 | 36 | 11,8 | 06013003 |
| 18x18x18 | 75 | 26 | 26 | 37,5 | 13,8 | 06013005 |
| 20x20x20 | 76 | 26 | 26 | 38 | 15,8 | 06013007 |
| 25x25x25 | 92 | 32,6 | 32,6 | 46 | 19,8 | 06013009 |
| 32x32x32 | 98,2 | 32,6 | 32,6 | 49,5 | 25,8 | 06013011 |
| 40x40x40 | 136 | 45 | 45 | 68 | 31,8 | 06013013 |
| 50x50x50 | 147 | 45 | 45 | 73,5 | 40,8 | 06013015 |
| 63x63x63 | 206 | 68 | 68 | 103 | 50,7 | 06013017 |
| 75x75x75 | 217 | 68 | 68 | 110,5 | 59,6 | 06013019 |

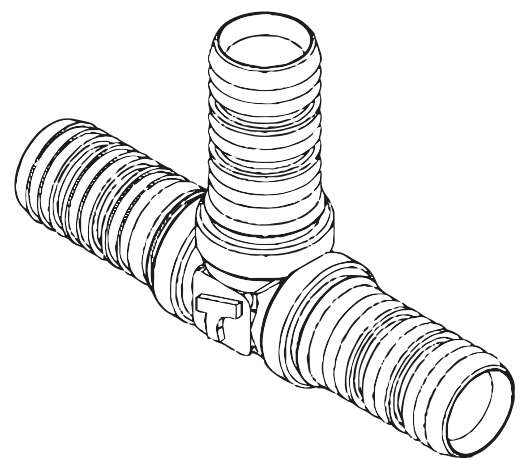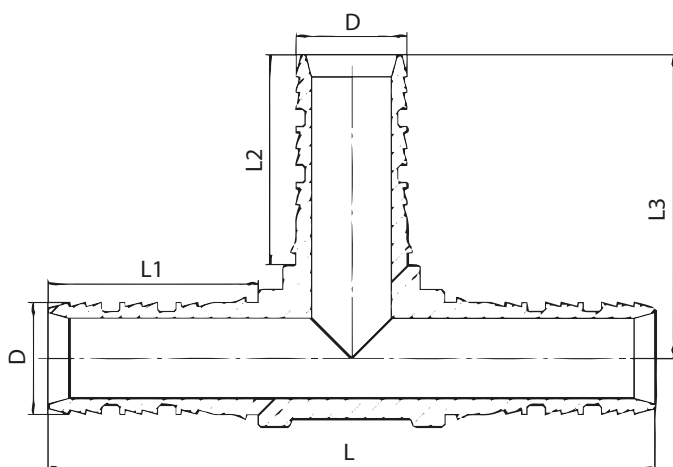

Overview

The connection between the pipe and the fitting is obtained by pressing the pipe into the fitting's profile. The pressing should be made in the connection area, with a pressing tool equipped with U-type inserts, matched to the type of fitting used. The tightness of the connection chamber is guaranteed by two O-rings, perfectly integrated into the joint area. Pressed connections can be used in the floor groove or a wall furrow.



Tweetop sp. z o.o.
Ludowa 24c | 71-700 Szczecin

Scope of delivery

Main body with sealing and clamping rings

Visit [Plumb2u](https://www.plumb2u.com)

See product