

The most hygienic WAY TO FLUSH!

FLUSH

TOUCHLESS

Suitable for close coupled and low-level ceramic cisterns.

BENEFITS



100% HYGIENIC

Touchless infrared detection button.



WATER SAVING

Water Volume Control.



QUICK & EASY TO INSTALL AND MAINTAIN

No height adjustment compensates misalignment between lid hole and tank. Cable operated system.



PROVEN PERFORMANCE

Endurance tested to 200,000 flush cycles.



Visit [Plumb2u](#)

WINDUP See product

TOUCHLESS

wirquin
Innovation

LONGLASTING

TOUCHLESS has a battery lifespan of 40,000 flush cycles (more than 5 years at the rate of 20 flushes/day). The TOUCHLESS button works with x4 AA alkaline batteries.

Thanks to its motion activated infrared mechanism, any contact with the flush button can be avoided, making the TOUCHLESS a great hygienic option. The user can control the volume of water being used to flush with a quick hand wave activating half a flush, and a handheld over the button for 4 seconds activating a full 6L flush. In the rare occasion of battery failure, a manual override is available. The cable operated button allows for easy installation and can easily be adjusted to the height of the cistern.



100% HYGIENIC



WATER SAVING




QUICK & EASY TO INSTALL AND MAINTAIN



BUTTON IR DETECTION OR MANUAL ACTIVATION IF NEEDED



ENDURANCE TESTED TO 200,000 FLUSH CYCLES

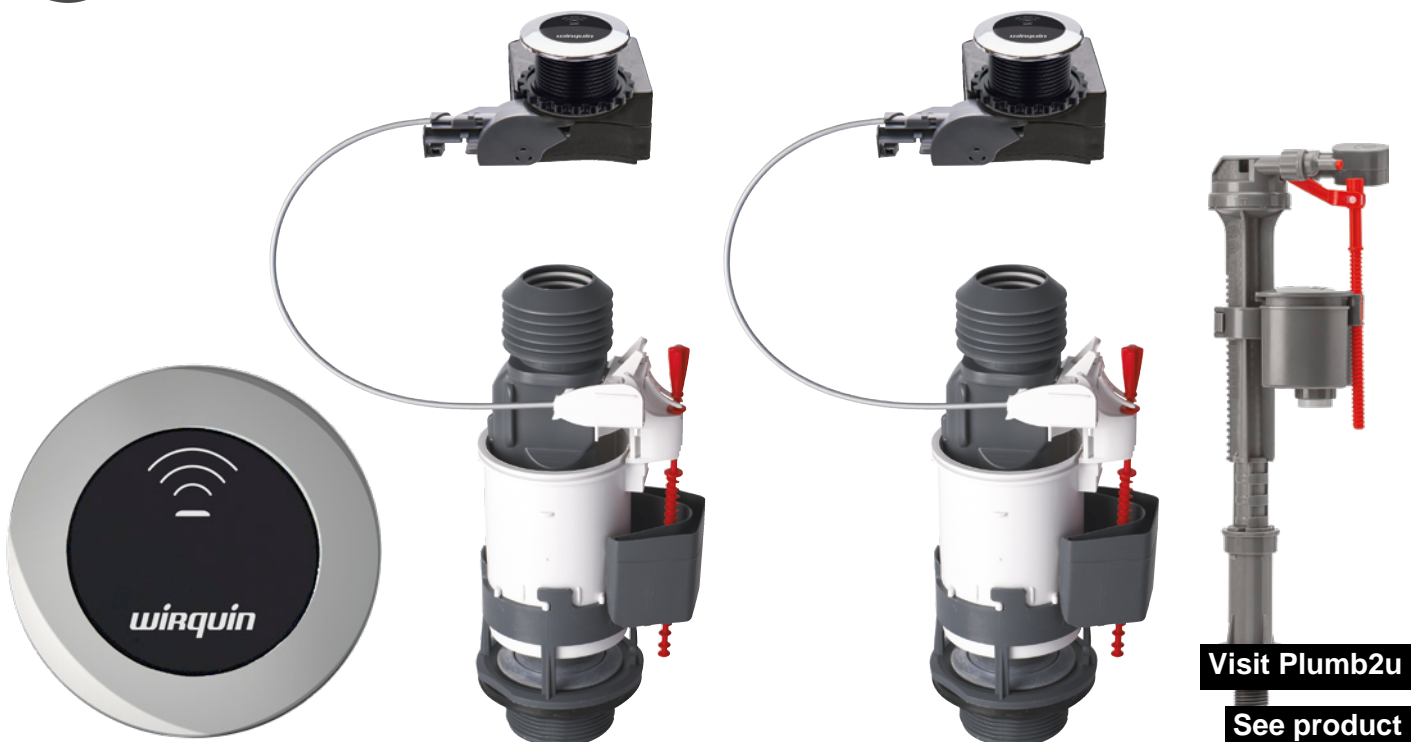

TOUCHLESS

The TOUCHLESS operates without contact thanks to its infrared sensor which detects the slightest movement. TOUCHLESS is the 100% hygienic solution and guarantees effective protection against germs, bacteria and viruses.



CHARACTERISTICS

Touchless
Adjustable


Positioning of button: Top
Length of cable: 300 mm

Height of cistern min.: 320 mm
Height of cistern max.: 420 mm

Lid hole diameter min.: 38 mm
Lid hole diameter max.: 45 mm

Base diameter: 1.5" - 2"

Adjustment of the overflow: Telescopic
Height of the overflow min.: 185 mm
Height of the overflow max.: 230 mm

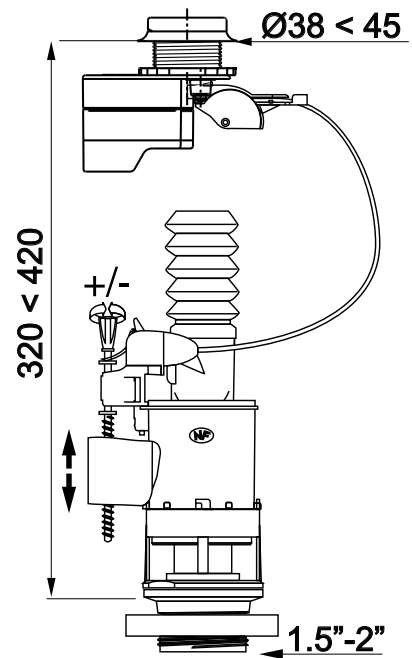

CARE AND CLEANING

It is recommended to service the flush valve every 5 years. To do so, remove the flush valve by turning 1/4 turn, remove the sealing washer and clean with soapy water before repositioning. Do not use cleaning products or drain cleaners that contain bleach, acid, or harsh chemicals.

QUALITY

Longlasting: 5 year life span with 4 AA alkaline batteries. 10 year Warranty on mechanism.

TIPS

The dual flush mechanism is set to 3 litres for a small flush and 6 litres for a full flush, saving up to 40,000L per year (based on a family of 4).

[Visit Plumb2u](#)

[See product](#)

TOUCHLESS

The most hygienic way to flush



Product name	Reference	EAN code	Packaging	Single	Box Qty	Pallet Qty
TOUCHLESS Flush Valve & Sensor	10950189	6425366005713	BOX	1	8	160
TOUCHLESS FLUSHING KIT With Jollyfill Air Telescopic Inlet Valve	10950190	6425366005720	BOX	1	6	120

Please contact our office to discuss your ordering terms.



**ORDER
NOW**

Speak to our sales team
tel: +44(0) 333 222 4488
email: sales@wirquin.co.uk

www.wirquin.co.uk

Visit Plumb2u

See product

wirquin