

A11/A11.Open

Technical description

A11

Structure:

Body: The body of the furniture has a framework structure. It is assembled out of interconnected ribbing and hoops made of plywood. The body is covered with flame resistant upholstery foam on the inside and outside. The chair is finished in Wool fabric. Inner and outer surfaces are in one colour, cushions in another.

Door: Made of curved plywood. The body is covered with flame resistant upholstery foam on the inside and outside. The door is finished in Wool fabric. Outer and inner surfaces are in the same colour.

Sliding door mechanism: The mechanism is created as a set of hoops rolling against each other. The hoops are made of plywood. Polyurethane rollers provide quiet and smooth motion. From below the mechanism is covered by a powder coated steel ring and from above by a ring-shaped upholstery element in the same colour as the body.

Foot: The foot of the chair is a four-pronged aluminium casting. It has a chrome finish.

Additional equipment: The chair is equipped with a USB Type A charger. The charger has a 12V power supply. It supplies 15W/2A. The charger is placed on the left inner wall of the chair. The power socket is located at the bottom of the chair on the back of the external wall.

Spring layer:

The following have been utilized in the backrest and the seat: polyurethane foam with density 25 kg / m³ and resilience 20, padding layer consisting of a non-woven furniture fabric, density 200 g / m². The backrest and the seat upholstered with WOOL fabric.

A11 Open

Structure:

Body: The body of the furniture has a framework structure. It is assembled out of interconnected ribbing and hoops made of plywood. The body is covered with flame resistant upholstery foam on the inside and outside. The chair is finished in Wool fabric. Inner and outer surfaces are in one colour, cushions in another.

Foot: The foot of the chair is a four-pronged aluminium casting. It has a chrome finish.

Additional equipment: The chair is equipped with a USB charger. The charger has a 12V power supply. It supplies 15W/2A. The charger is placed on the left inner wall of the chair. The power socket is located at the bottom of the chair on the back of the external wall.

Spring layer:

The following have been utilized in the backrest and the seat: polyurethane foam with density 25 kg / m³ and resilience 20, padding layer consisting of a non-woven furniture fabric, density 200 g / m². The backrest and the seat upholstered with WOOL fabric.

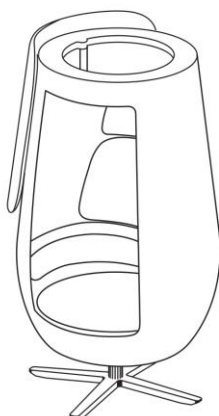
✓ WOOL

- Weight: 325 g/m²
- Composition: 70% wool (WO), 20% polyester (PL), 5% polyamide (PA), 5% other fabrics (AF)
- Abrasion resistance: 100.000 Martindale cycles (EN ISO 12947-2)
- Friction resistance: wet: 4/5 dry: 4/5 (ISO105 – X12:2002)
- Light resistance: 4 (EN ISO 105-BO2:1999)

Products

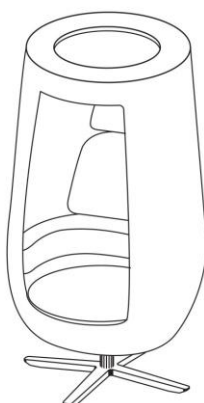
 net / gross weight (kg/lbs)
  volume of product – m³/ft³ / volume of package– m³/ft³
 number of packages

A11		
[W x D x H]	INDEX	








Product: 870 x 940 x 1650 34.25 x 37 x 64.96in Package: 1000 x 1000 x 1800 39.37 x 39.37 x 70.86in			A11-MT-002		
			50 kg (110 lbs) / 77 kg (170 lbs)	1,35 m ³ (47.67 ft ³) / 1.8 m ³ (63.56 ft ³)	1

A11.Open		
[W x D x H]	INDEX	



Product: 850 x 900 x 1600 33.46 x 35.43 x 62.99in Package: 1000x1000x1800 39.37 x 39.37 x 70.86in			A11-MT-001		
			41 kg (90 lbs) / 68 kg (150 lbs)	1,22 m ³ (43.08 ft ³) / 1.8 m ³ (63.56 ft ³)	1

Available colours

FOOT									
CHROME									
DOOR MECHANISM									
COSMOS GREY									
FABRIC									
WOOL FABRIC									
									
TCA	TBI	TDU	THI	TSI	TPE	TGR	TON	TOR	THY
									
TLI	TWO	TTE	TFI	TFU	TPL	TEG	TIN	TEM	TCL
									
TPC	TRC	TST	TMS	TSN	TTM	TSG	TJA		