

Drainage Range

- A15 Channel Drainage
- B125 Channel Drainage
- C250 Channel Drainage
- Edge Slot Channel Drainage
- Flexible Couplings
- Pipe Lubricant
- Flap & Non-Return Valve

DEK DRAIN A15

CHANNEL DRAINAGE THAT MAKES SENSE

A Brand New Design In Our Plastic Channel Drainage

DekDrain A15 Plastic Channel Drainage features a new engineered design in channel drain. Due to its plastic linear bar grating design, water flow is disrupted and protects against traversing water, unlike traditional gratings. Measuring 78mm in depth, its perfect for your paving projects. Also featuring the new push fit, clip in bottom outlet which makes for simple, quick, user-friendly assembly. Each channel measures 1000mm, with a cutting and jointing point at 500mm for applications that require a shorter length. Connect to 110mm plastic pipe with an outlet junction located at either end of the channel for ease of use. DekDrain A15 is a channel drainage that makes sense!

Certified to BS EN 1433, DekDrain is a high quality, yet cost effective solution for stylish surface drainage. Also available in traditional slotted galvanised grating.

Find out more at www.deks.co.uk/a15

78

78mm Channel Depth
Ideal for all paving projects

2

2 Point Bottom Outlet Positioning
Outlet located at either end to 110mm

1.5

A15
Designed for maximum weight of 1.5 tonnes





Channel Lengths 1000 x 78mm

A15 channel drain 1000mm (L) x 114mm (W) x 78mm (H), available in new linear bar design plastic grating or slotted galvanised steel grating.

Product Code	Description	Material
DCD-1M-GS-M	DekDrain A15 HDPE Channel Galv Grate 1m	Galvanised / Plastic
DCD-1M-PL-M	DekDrain A15 HDPE Channel Plastic Grate 1m	Plastic / Plastic



Corner Quads

Connect your DekDrain in up to four different directions or change direction with a corner quad. Available to match both plastic and galvanised grating styles.

Product Code	Description	Material
DCD-CQ-GS-M	DekDrain A15 Corner Quad With Galv Grate	Galvanised / Plastic
DCD-CQ-PL-M	DekDrain A15 Corner Quad With Plastic Grate	Plastic / Plastic



Accessories

The accessory bag contains 1 x outlet connector and 2 x end caps. Use the end caps to close off the ends of the channel drainage. The outlet connector simply clips into place on the bottom of the channel and connects to 110mm plastic pipe.

Product Code	Description	Material
DCD-AS-M	DekDrain A15 Accessory Bag (2 x End Caps, 1 x Bottom Outlet Connector)	Plastic



Garage Packs

For perfect garage drainage, use a garage pack. Everything you need to provide stylish surface drainage for your garage. Includes 3 x 1000mm channels and an accessory bag.



Product Code	Description	Material
DCD-GP-GS	DekDrain A15 Garage Pack (3 x Channel With Galv Grate + Accessory Bag)	Galvanised / Plastic
DCD-GP-PL	DekDrain A15 Garage Pack (3 x Channel With Plastic Grate + Accessory Bag)	Plastic / Plastic

DEK DRAIN EDGE

DekDrain Aluminium “Edge” slot drain is amazing. Adding a cutting edge finish to your drainage design, with a clean stylish look. In a tremendous leap forward, DEKS are bringing a cost effective Metal Edge Slot Drain to the domestic A15 patio and driveway market. DekDrain Edge offers a unique and envied look to the finish, where it matters, (previously only available in more expensive full steel products). Each slot wall is capped with a fabulous looking square faced, visible, non-rusting, polished aluminium edge.

Additionally Edge is a fabulous substitute for use as a Threshold Drain, finishing off the connect between hard landscaping and property. The 82mm upstand ensures the paving has enough space for a securing bed of mortar to fix and forget with no need to trim the back edge off pavers. Featuring an overall height of just 167mm (<2 brick courses), Edge will sit above the concrete slab with ease. Excavation time is optimised to offer you savings on installation.


Designed with an ovoid shape, creating a dry weather channel. This ensures water flows better, acting as a self-cleansing agent to the last drop, reducing maintenance, risk of blockages and cleaning. Use of the stylish access quad-box gives you discreet access for washing out silt when necessary.



80mm Upstand
No need to cut down paving



Compact Height
Less excavation and quicker installation



Narrow Slot Aluminium Edge
Strong, stylish and rust proof



Dry Weather Channel
Self cleansing and less maintenance



DekDrain Edge

Measuring 1000mm (L) x 167mm (H) x 98mm (W) with an 82mm upstand for easy laying.

Product Code	Description
DCD-SD-M	DekDrain Slot Drain Metal Edge



DekDrain Edge Corner Quad

- Quad features elegant surface grating
- Quad provides an access point - easy cleaning
- Use Quad for directional changes
- No screws needed - easy connection to drain pipe

Product Code	Description
DCD-SD-CQ	DekDrain Slot Drain Corner Quad



DekDrain Edge Accessories

- Clip in connections - quick fitting
- Outlet connects to 110mm pipe

Product Code	Description
DCD-SD-AS	DekDrain Slot Drain Accessory Bag (2 x end cap, 1 x outlet)

For more information visit www.deks.co.uk/edge

picture gallery | technical information | installation instructions | how-to videos

DEK DRAIN EEZEE



Eezee channel has colossal advantages

Featuring 6 cut points, enabling end to end interlocking stability on runs with cuts. Easily create a socket/spigot channel with no butted joints at 300 / 400 / 600 / 700 & 800mm lengths. Cutting to 500mm leaves an end butt joint. Cuts between 300 - 500mm and 800 - 1000mm will allow full grating lockdown.

With Eezee channel you get 12 drain connection points alongside the ability to interlock in 8 directions, creating crosses, tees, and staggered runs without additional fittings. Save money and time. Get the job done faster with less components.

HDPE is silky smooth for self-cleansing and reduced silt build up which reduces maintenance costs and cleaning. A relatively lightweight yet strong material provides a robust channel which is less prone to transit or onsite breakages reducing downtime.

Eezee to order

DekDrain Eezee is complete. No more buying components separately. It comes complete, hassle free with no lost components.



Grid & Wave Design Grating
Stylish & great performance



12 Outlet Options
Easily connect to underground drainage



PP Channel & PVC Grating
Light weight, easy to handle, fewer damages onsite or during transport



Easy & Clean To Cut vs Concrete
No heavy machinery - No dust clouds

DekDrain Eezee



Available in both B125 and C250 options to suit the scheme. The channel measures 1000mm (L) x 131mm (W) x 98mm (H).

- Each 500mm grating is secured by a bolt and locking bar
- Easily create a 90-degree tee or elbow with no corner quads
- Flexible outlet connections - 12 outlet options to best suit your installation
- No additional fittings needed - Eezee saves money
- Certified EN1433



Grating Styles

Eezee B125 Grid



All plastic super strong, slip proof, heel protection grid profile grating with massive benefits on installation.

HDPE Channel PVC Grid Gating

B125 is Certified for use on Driveways, car parks, pedestrian areas, pathways.

Eezee C250 Wave



Up-style your drainage scheme with our fantastic wave linear gating!

“Super Sleek styling - Amazing Water Capture”

Disrupt water in its tracks with style on your project.

HDPE Channel with Ductile Iron Gating.

C250 is Certified for use on driveways, pedestrian areas, pathways,

Lightly trafficked roads & kerbside small private car parks, light goods areas.

No corner quads required


Each Eezee length features three connection points on each side of the channel body, as well as connection points at either end of the channel. Easily create the channel layout that you need to complete the job. Simply remove the blanking cap on the connection point you are using and connect the next length of channel by slotting it into place. The connection securely holds in place during installation.



Product Code	Rating	Grating Style	Width	Depth	Length
DCD-EZ-98-B125-G/B	B125	Grid	131mm	98mm	1000mm
DCD-EZ-98-C250-W/B	C250	Wave	131mm	98mm	1000mm

DekDrain Eezee Outlets

If you like choice, you'll love DekDrain Eezee. A single length has 12 outlet options and 11 outlet points. All of these options are created from only three additional connections. Each outlet end cap can also double as a blanking off end cap.

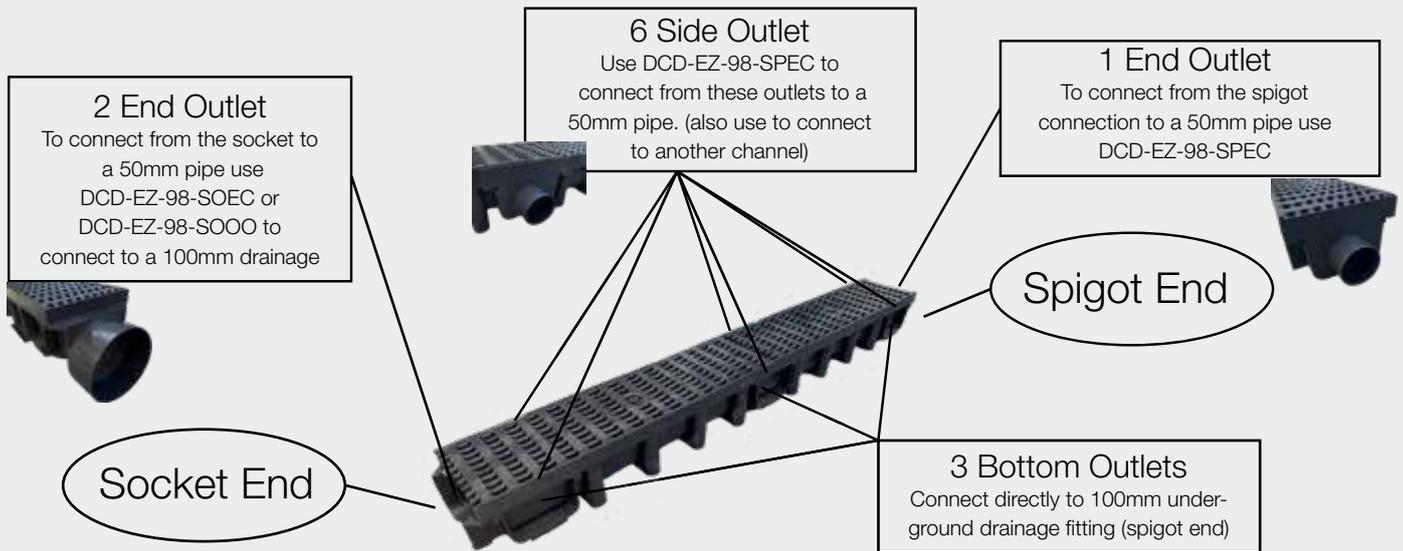

Product Code	Description
DCD-EZ-98-SOEC	Socket End Cap for Eezee channel Black c/w 50mm Outlet Option
DCD-EZ-98-SOOO	Socket Offset Outlet to 110mm for Eezee Channel Black
DCD-EZ-98-SPEC	Spigot End Cap for Eezee channel Black c/w 50mm Outlet Option



DekDrain Eezee Silt Box

Used to keep the channel drainage free of silt or dirt, maintaining the ability for the channel to continue flowing freely and efficiently. DekDrain Eezee silt box comes complete with a silt basket.

Measures 500mm (L) x 131mm (W) x 280mm (D). Features one 110mm outlet connectors on each side.

Product Code	Rating	Grating Style	Width	Channel Depth	Length
DCD-EZ-SB98-B125-G/B	B125	Grid	131mm	98mm	500mm
DCD-EZ-SB98-C250-W/B	C250	Wave	131mm	98mm	500mm



DekDrain Eezee Outlet Connector

Used to connect from Eezee 2" outlet end caps to 4" underground drainage pipe. The outlet connector is rotational in any direction as well as adjustable from 0-90 degrees.

Product Code	Description
DCD-EZ-OC	DekDrain Eezee 2-4" Universal Variable Connector

Useful information for Eezee



Key Measurements



Eezee Installation Guide



Outlet Connector Guide

For more information visit www.deks.co.uk/eezee

picture gallery | technical information | installation instructions | how-to videos

BandFlex EPDM Flexible Couplings



Standard Couplings

Designed to be used where a full resistance to shear or deflection is required, made from quality EPDM rubber and 316 stainless steel end and centre bands. These couplings offer installers peace of mind connections, and are expected to have a lifetime beyond the pipelines design life.

Product Code	Description
DSC115	BandFlex Standard Coupling 100-115mm
DSC125	BandFlex Standard Coupling 110-125mm
DSC137	BandFlex Standard Coupling 120-137mm
DSC150	BandFlex Standard Coupling 125-150mm
DSC165	BandFlex Standard Coupling 140-165mm
DSC180	BandFlex Standard Coupling 160-180mm
DSC200	BandFlex Standard Coupling 175-200mm
DSC215	BandFlex Standard Coupling 190-215mm
DSC225	BandFlex Standard Coupling 200-225mm
DSC250	BandFlex Standard Coupling 225-250mm
DSC265	BandFlex Standard Coupling 240-265mm
DSC275	BandFlex Standard Coupling 250-275mm
DSC290	BandFlex Standard Coupling 265-290mm
DSC315	BandFlex Standard Coupling 290-315mm
DSC335	BandFlex Standard Coupling 310-335mm
DSC345	BandFlex Standard Coupling 320-345mm
DSC365	BandFlex Standard Coupling 340-365mm
DSC385	BandFlex Standard Coupling 360-385mm
DSC420	BandFlex Standard Coupling 395-420mm



Pipe Couplings

Used to connect pipes where minimal shear and deflection conditions exist on site. EPDM pipe couplings are designed to connect pipe of a similar material and/or size. Couplings have been extensively tested for above ground and below ground usage applications.

Product Code	Description
DPC115	BandFlex Pipe Coupling 100-115mm
DPC125	BandFlex Pipe Coupling 110-125mm
DPC150	BandFlex Pipe Coupling 125-150mm
DPC165	BandFlex Pipe Coupling 145-165mm
DPC180	BandFlex Pipe Coupling 160-180mm
DPC200	BandFlex Pipe Coupling 175-200mm
DPC215	BandFlex Pipe Coupling 200-215mm
DPC225	BandFlex Pipe Coupling 210-225mm
DPC250	BandFlex Pipe Coupling 225-250mm
DPC275	BandFlex Pipe Coupling 250-275mm
DPC290	BandFlex Pipe Coupling 265-290mm



Adaptor Couplings

These couplings provide an excellent and cost efficient method of joining two pipes with differing diameters without needing to use a bushing.

Product Code	Description
DAC4000	BandFlex Adaptor Coupling 137-121 to 121-110mm
DAC6000	BandFlex Adaptor Coupling 180-200 to 160-180mm



Large Standard Couplings

DEKS manufacture large standard couplings up to 4m diameter. Made from EPDM rubber and stainless steel you can be sure of a great quality coupling. All large standard couplings are made to order.

Universal Waste Adaptor



UWA100

Accepts 22mm to 60mm (3/4" - 2") waste pipe

External waste pipes can be connected directly to a surface water drain, or depending on the design, via a gully trap to the underground drainage system.

Simply cut the UWA100 to the required pipe size.

- ✓ Easily cut to size to fit 22-60mm (3/4" - 2") waste pipe.
- ✓ Can be used as an adaptor or stopper.
- ✓ Stops construction debris from blocking drains when used as a stopper



Product Code	Description
UWA100	110mm Universal Waste Adaptor

Universal Rainwater Adaptor



URA100

Accepts 68mm round and 65mm square down

External rainwater downpipe can be connected directly to the surface water drain or, depending on the design via a gully trap to the underground drainage system.

- ✓ Manufactured from high quality EPDM
- ✓ Connects all 110mm round & square rainwater pipes &
- ✓ Low cost universal solution
- ✓ Tidy post fix appearance

Product Code	Description
URA100	110mm Universal Rainwater Adaptor





Adaptor Couplings

Adaptors will connect two pipes of different diameters. As a general rule adaptors will close down between 5mm and 20mm from the larger moulded size stated.

Product Code	Description	Pipe OD Range
DACE-44-37	ValueFlex 1.5" x 1.25"	44-36mm to 37-29mm
DACE-57-37	ValueFlex 2" x 1.25"	57-49mm to 37-29mm
DACE-57-44	ValueFlex 2" x 1.5"	57-45mm to 44-36mm
DACE-60-48	ValueFlex 2.5" x 1.5"	60-48mm to 48-40mm
DACE-77-48	ValueFlex 3" x 1.5"	77-60mm to 48-40mm
DACE-89-48	ValueFlex 3" x 1.5"	89-75mm to 48-40mm
DACE-89-60	ValueFlex 3" x 2"	89-75mm to 60-48mm
DACE-111-48	ValueFlex 4" x 1.5"	111-100mm to 48-40mm
DACE-112-60	ValueFlex 4" x 2"	112-100mm to 60-48mm
DACE-114-89	ValueFlex 4" x 3"	114-97mm to 89-75mm
DACE-120-114	ValueFlex 4" AC to 4" CI/PVC	120-108mm to 114-97mm
DACE-122-48	ValueFlex 5" x 1.5"	122-115mm to 48-40mm
DACE-133-89	ValueFlex 4" EW to 3" CI/PVC	133-121mm to 89-74mm
DACE-4000	ValueFlex 4" EW to 4" PVC	137-122mm to 114-97mm
DACE-142-114	ValueFlex 5" x 4"	142-122mm to 114-97mm
DACE-162-114	ValueFlex 6" x 4"	162-147mm to 114-97mm
DACE-190-114	ValueFlex 6" EW to 4" CI/PVC	190-170mm to 114-97mm
DACE-190-170	ValueFlex 6" EW to 6" CI/PVC	190-170mm to 170-150mm
DACE-6000	ValueFlex 6" EW to 6" PVC	196-176mm to 162-142mm
DACE-215-162	ValueFlex 8"x 6"	215-195mm to 162-142mm

EW = CLAY (check pipe OD)
 CI = CAST IRON
 PVC = PLASTIC



Pipe Couplings

Pipe couplings will connect pipes which are similar or the same in diameter, Couplings will close down to smaller diameters between 5mm and 20mm from the moulded size stated.

Product Code	Description	Pipe OD Range
DPCE-27	ValueFlex 0.75" x 0.75" PVC	27 - 22mm
DPCE-34	ValueFlex 1" x 1" PVC	34 - 24mm
DPCE-37	ValueFlex 1.25" x 1.25" PVC	37 - 27mm
DPCE-49	ValueFlex 1.5" x 1.5"	49 - 41mm
DPCE-61	ValueFlex 2" x 2" PVC	61 - 46mm
DPCE-70	ValueFlex 2.5" x 2.5" PVC	70 - 55mm
DPCE-84	ValueFlex 3" x 3"	84 - 69mm
DPCE-92	ValueFlex 3" x 3" PVC	92 - 80mm
DPCE-114	ValueFlex 4" x 4" PVC	114 - 97mm
DPCE-127	ValueFlex 4" x 4" CI/PL	127 - 110mm
DPCE-142	ValueFlex 4"x 4" EW	142 - 122mm
DPCE-170	ValueFlex 6" x 6" PVC	170 - 150mm
DPCE-190	ValueFlex 6" x 6" EW	190 - 170mm
DPCE-220	ValueFlex 8" x 8" PVC	220 - 200mm

ValueFlex EPVC Pipe Connectors



Elbows and Tees

Solve tricky plumbing applications with collapsible fittings.



Product Code	Description	Pipe OD Range
DECE-L-48	ValueFlex Elbow 1.5"	48 - 40mm
DECE-T-48	ValueFlex Tee 1.5"	48 - 40mm
DECE-L-60	ValueFlex Elbow 2" x 2"	60 - 48mm
DECE-T-60	ValueFlex Tee 2" x 2"	60 - 48mm
DECE-L-89	ValueFlex Elbow 3" x 3"	89 - 75mm
DECE-T-89	ValueFlex Tee 3" x 3"	89 - 75mm
DECE-L-114	ValueFlex Elbow 4" x 4"	114 - 197mm
DECE-T-114	ValueFlex Tee 4" x 4"	114 - 197mm



End Caps

Provide secure air and water tight seals.

Product Code	Description	Pipe OD Range
DECE-EC-48	Value-Flex End Cap 1.5"	48 - 40mm
DECE-EC-60	Value-Flex End Cap 2"	60 - 52mm
DECE-EC-89	Value-Flex End Cap 3"	89 - 75mm
DECE-EC-114	Value-Flex End Cap 4"	114 - 97mm
DECE-EC-140	Value-Flex End Cap 5"	140 - 125mm
DECE-EC-160	Value-Flex End Cap 6"	160 - 145mm
DECE-EC-215	Value-Flex End Cap 8"	215 - 195mm

DekDrain Water Management



Flap Valve

Devices for protecting rooms on the lower levels against flooding caused by backward flow of storm water and sewage. Flap valves also effectively protect drainage systems from rodents entering the building and sealing outfalls where they exist.

Product Code	Description
FV-110	Flap Valve 110mm
FV-160	Flap Valve 160mm



Non-Return Valve

Non-return valve effectively seals your underground pipe work from a back flow of storm water, rodents and smells.

Product Code	Description
NRV-110	Non Return Valve 110mm
NRV-160	Non Return Valve 160mm

Pipe Lubricant

Kick the Bucket!

Developed with the contractor in mind - Easy squeeze applicator



Application based design

Designed to help insert the lubricant into the socket or onto the pipe with ease using the cutaway at the point of delivery. This helps you waste less lubricant on each application.

Better results and secure joints are less likely to leak, leading to better testing results.

Fits easily in your back pocket so when you're travelling or in a trench lying pipes your lubricant is always to hand, clean and easy to use.

The small hole on the nozzle is much less likely to become contaminated with site debris, this ensures the lubricant is pure when you connect the pipes and much less likely to fail testing due to foreign bodies sitting between the seal and pipe.

DEKS Nuetrex is fully compliant with WRAS use with potable water. Although mostly not required, it ensures that you are using a non-aggressive formula.

Wasted lubricant is ever present on site, however the viscosity in Nuetrex is non drip, so it will remain in the tube until compressed.

The very small hole at delivery point is just sufficient to deliver a bead of Lubricant to complete the joint which maximises the number of joints from the tube.


Faster to use

If you lay pipes regularly you will know that tubs of lubricant if used with a brush inevitably end up either on the pipe or on your hands/gloves meaning a firm grip is therefore more difficult and makes it much harder to push home firmly.

Kick the Bucket!

Using a tube of DEKS Lubricant is the most sensible solution, also you will never kick your bucket of lubricant over in the trench again!!

Product Code	Description
PPL-500ML	500ml Plastic Pipe Lubricant Nuetrex Tube

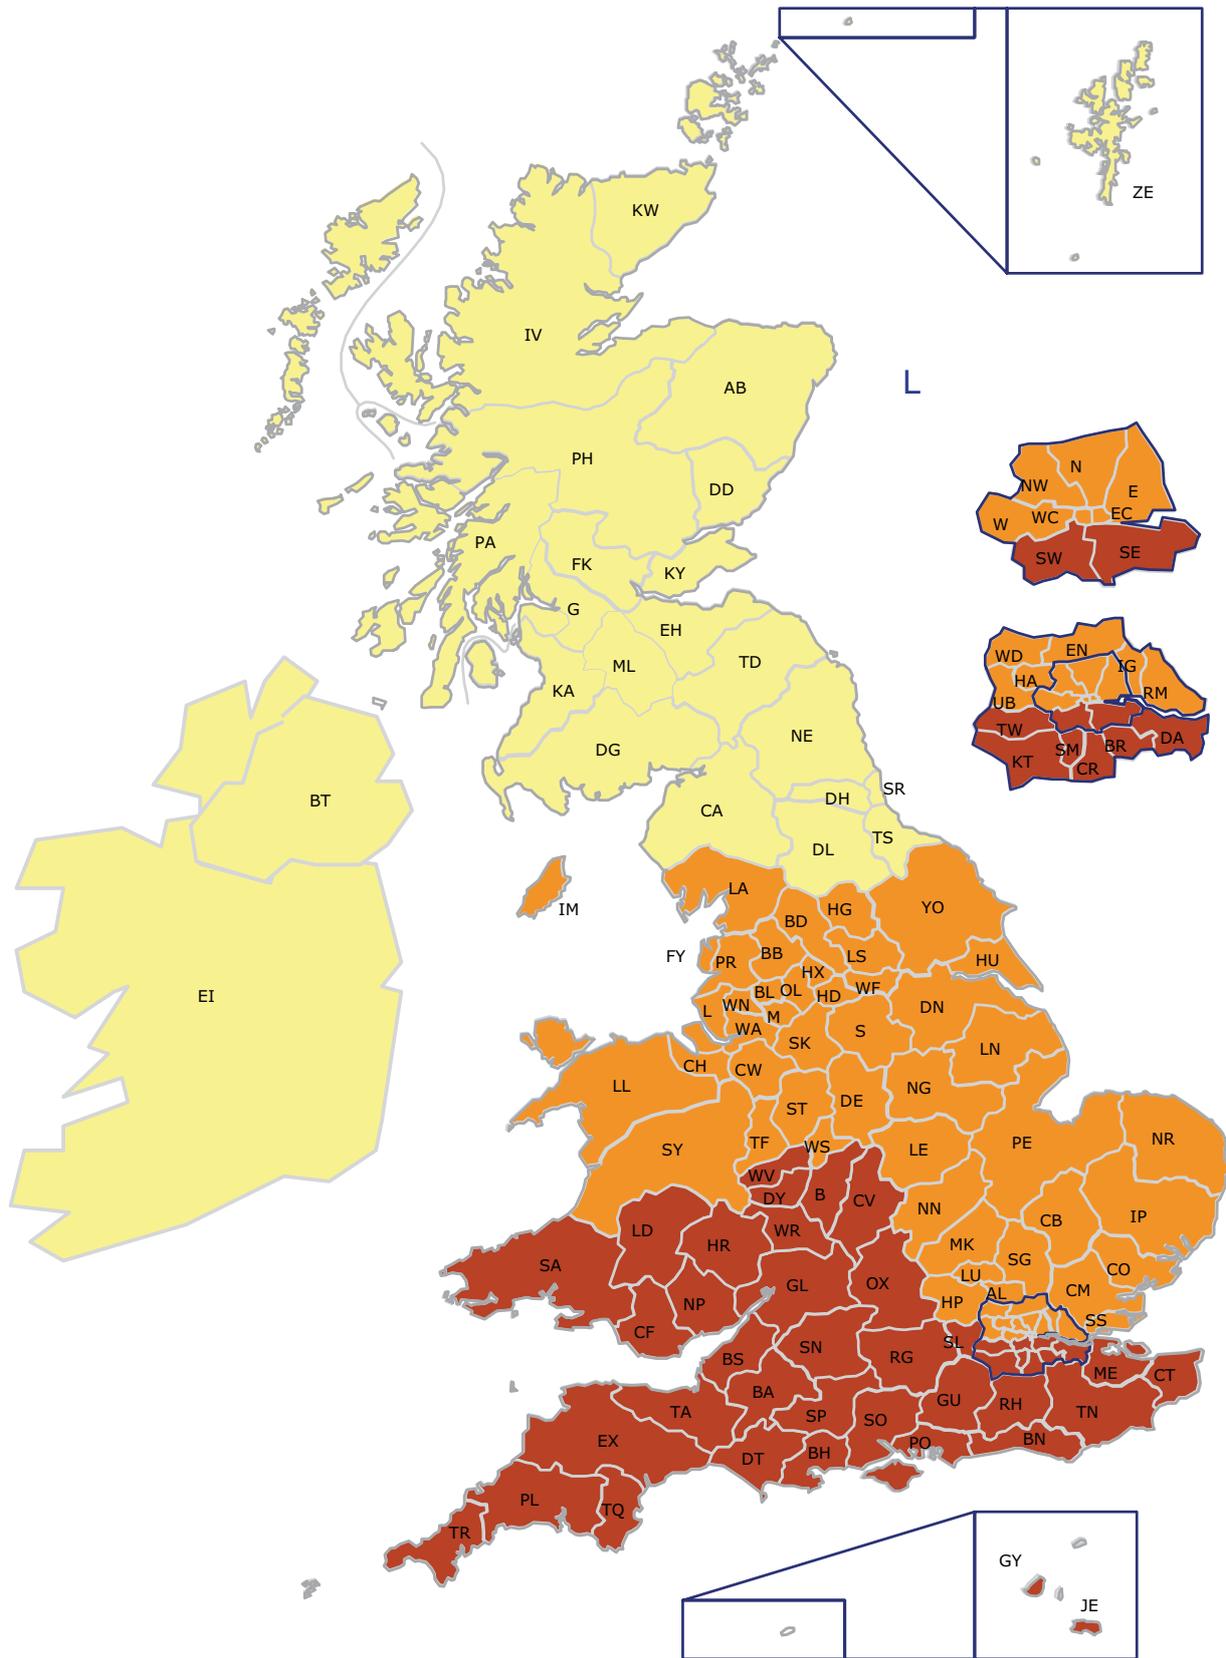

Mark Stewart
e: marks@deks.co.uk
m: 07903 389 220

Martin Hipkin
e: martinh@deks.co.uk
m: 07780 446 597

Lisa Spiller
e: lisas@deks.co.uk
p: 01275 866 985



EASY TO WORK WITH

T: 01275 858866

E: sales@deks.co.uk

W: www.deks.co.uk

Deks Industries Europe Ltd

West End Trading Estate

Blackfriars Road

Nailsea, Bristol, BS48 4DJ

While every effort has been made to ensure that the details in this brochure are correct at time of print we cannot accept responsibility for any errors or omissions

1331087275 - February 2022

